



PRESIDENT
GROUP

A R M A N I S



1200x1200 | 1600x800 | 1200x600 | 800x800 | 600x600 | 600x300mm


www.thepresidentgroup.com | www.presidentceramic.com

// ELEVATING LIVING THROUGH THOUGHTFUL DESIGNS



Experience the seamless union of white veins and captivating tones in the Armani Collection, where depth and elegance converge to transform any space. Elevate your design aesthetic effortlessly with this captivating collection, and craft a space that radiates unparalleled style and refinement.



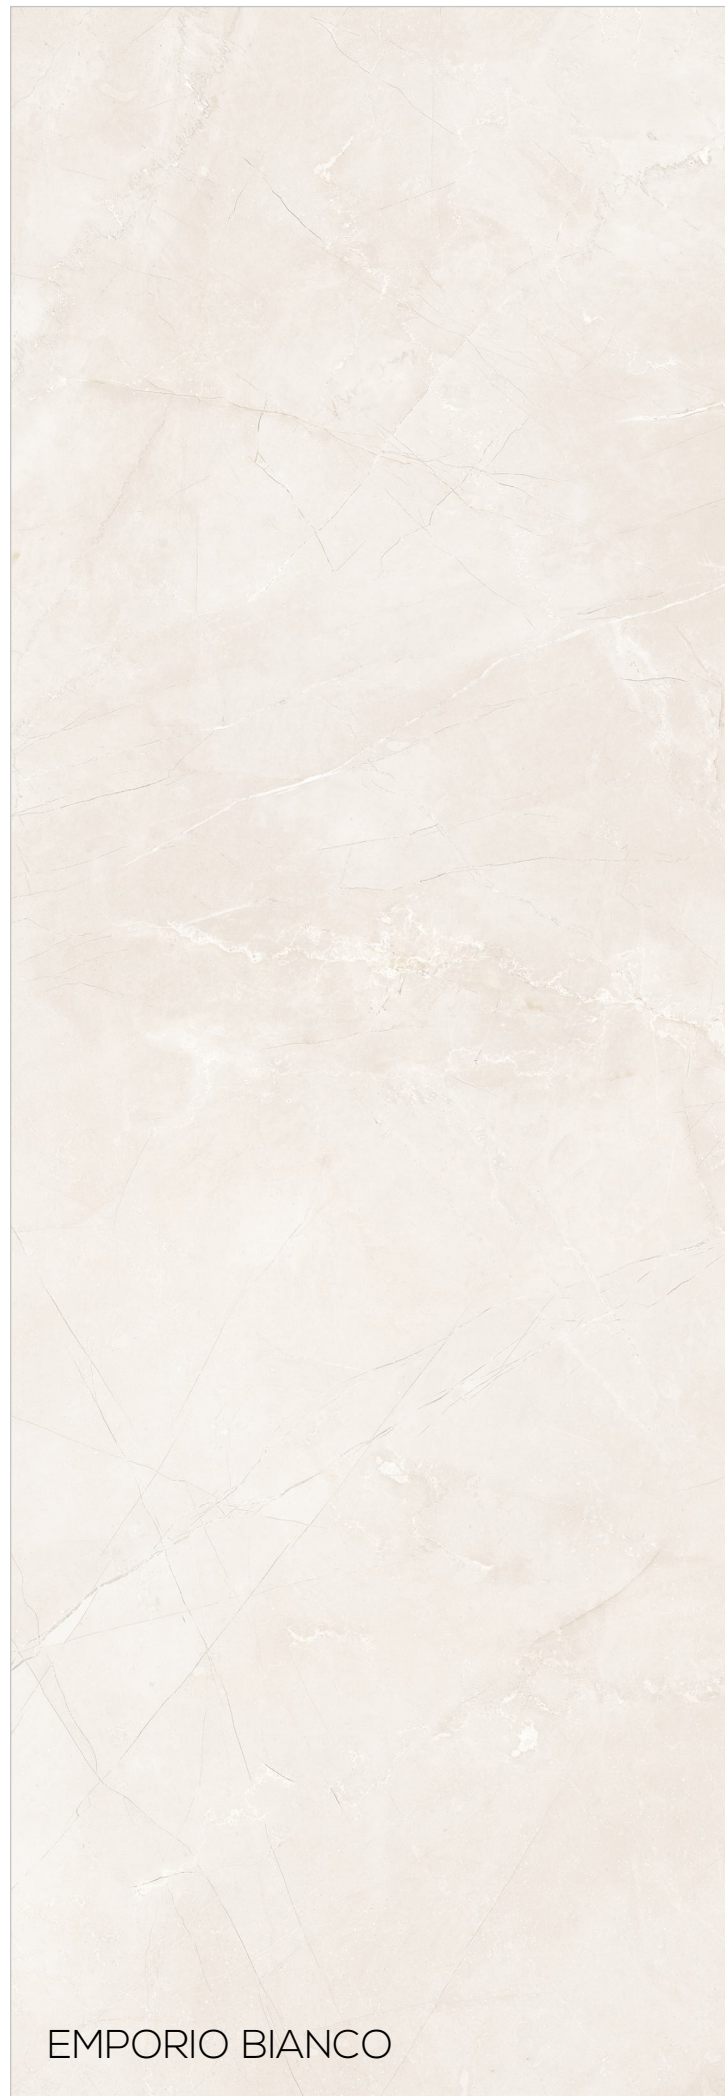









NEXUS CREMA



SAWANA SILVER



TACOMA








EDMON GREY



TOUCHSTONE GREY

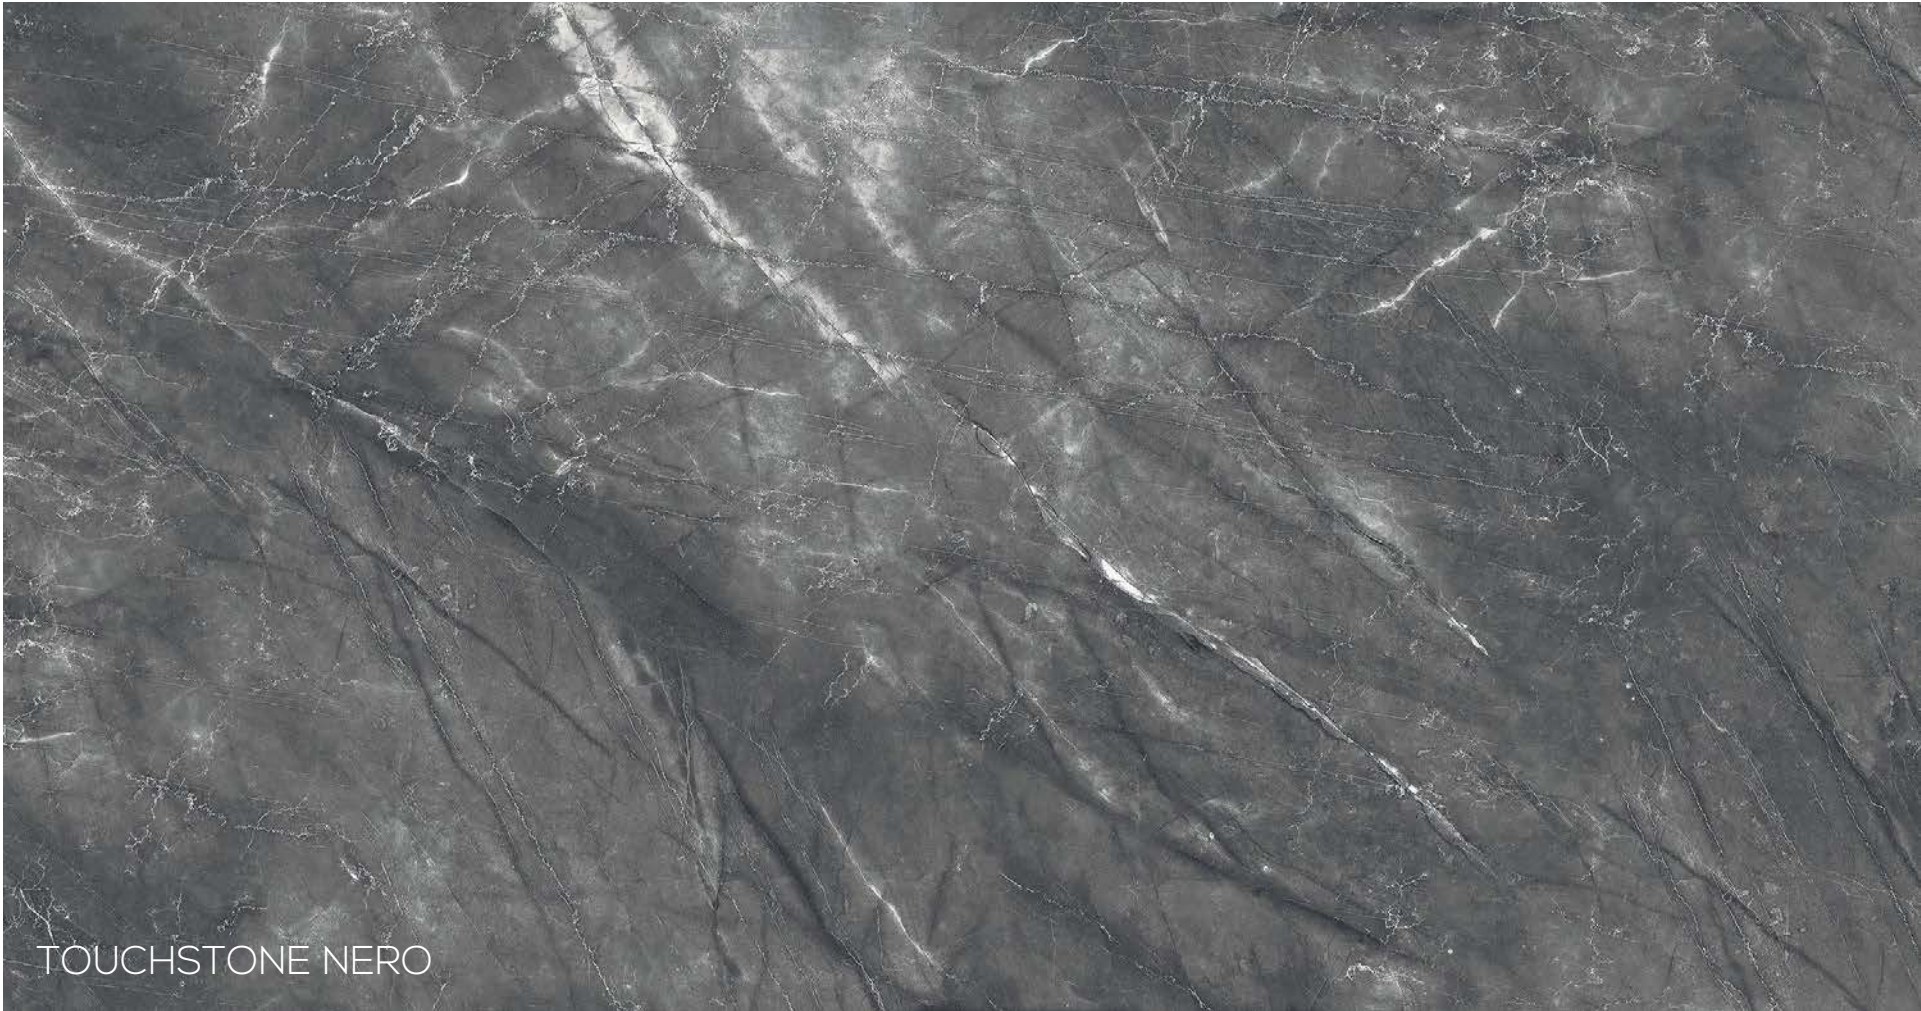

TOUCHSTONE NERO





IMPERIAL LIGHT GREY



IMPERIAL SILVER



IMPERIAL DARK GREY





IMPERIAL DARK GREY | 600x1200mm



JORDAN CREMA

JORDAN GRIS



JORDAN GRIS | 600x1200mm



MARMY SILVER



MARMY SAND



MARMY BROWN



MARMY GREY



PATAGONIA BIANCO



PATAGONIA BEIGE



PATAGONIA GRIS



LUMINA CREAM



LUMINA CARBON



SILVER STREAK



LUMINA CREAM | 600x1200mm




ARGOS RIDGE LATE



ARGOS RIDGE NATURAL



ARGOS RIDGE BIANCO

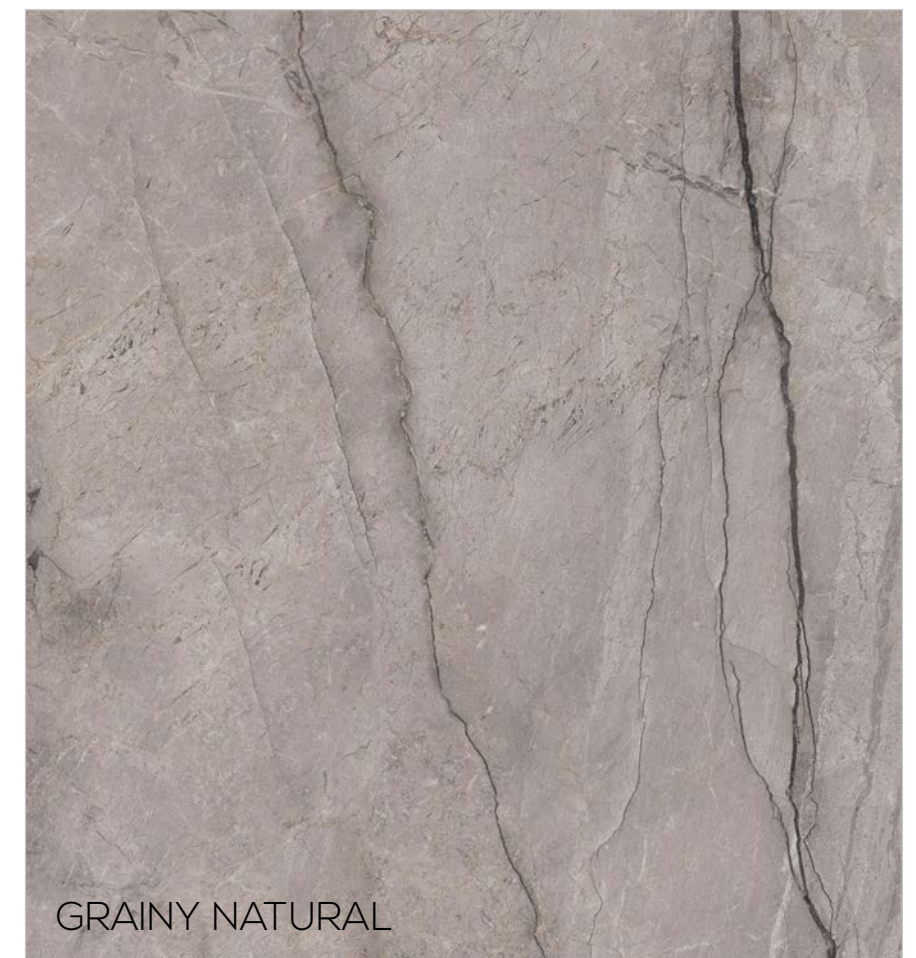

TECHNICAL
SPECIFICATION



CHARACTERISTIC	STANDARD AS PER ISO-13006 / En14411 GROUP Bla	VALUE	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	± 0.5%	± 0.3%	ISO-10545-2
Deviation in thickness	± 0.5%	± 4.0%	ISO-10545-2
Straightness in side	± 0.5%	± 0.1%	ISO-10545-2
Rectangularity	± 0.5%	± 0.1%	ISO-10545-2
Surface flatness	± 0.5%	± 0.2%	ISO-10545-2
Color difference	Unlterned	No change	ISO-10545-16
Glossiness	As per mfg.	Min 90 %	GLOSSY METER
STRUCTURAL PROPERTIES			
Water absorption	< 0.50%	< 0.05%	ISO-10545-3
MASSIVE MECHANICAL PROPERTIES			
Modulus of repture	Min. 35 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 1800 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
THERMO HYGROMRTRIC PROPERTIES			
Frost resistance	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	ISO-10545-9
Moisture expansion	Nill	Nill	ISO-10545-10
Thermal expansion(COE)	Max. 9.0x10 ⁻⁶	Max. 6.5x10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Min. Class 3	Class 5	ISO-10545-14

