



PRESIDENT
GROUP

T E R A Z Z O S



1200x1200 | 1600x800 | 1200x600 | 800x800 | 600x600 | 600x300mm


www.thepresidentgroup.com | www.presidentceramic.com

//

TRANSFORM OUR DESIGN WITH THE TIMELESS ALLURE




Inspired by the classic Italian flooring, these tiles blend a rich history with contemporary design, offering a sophisticated and versatile option for modern spaces. Each design showcases the unique beauty of terrazzo, featuring harmonious impressions of multiple colorful chips on a durable and stylish background.

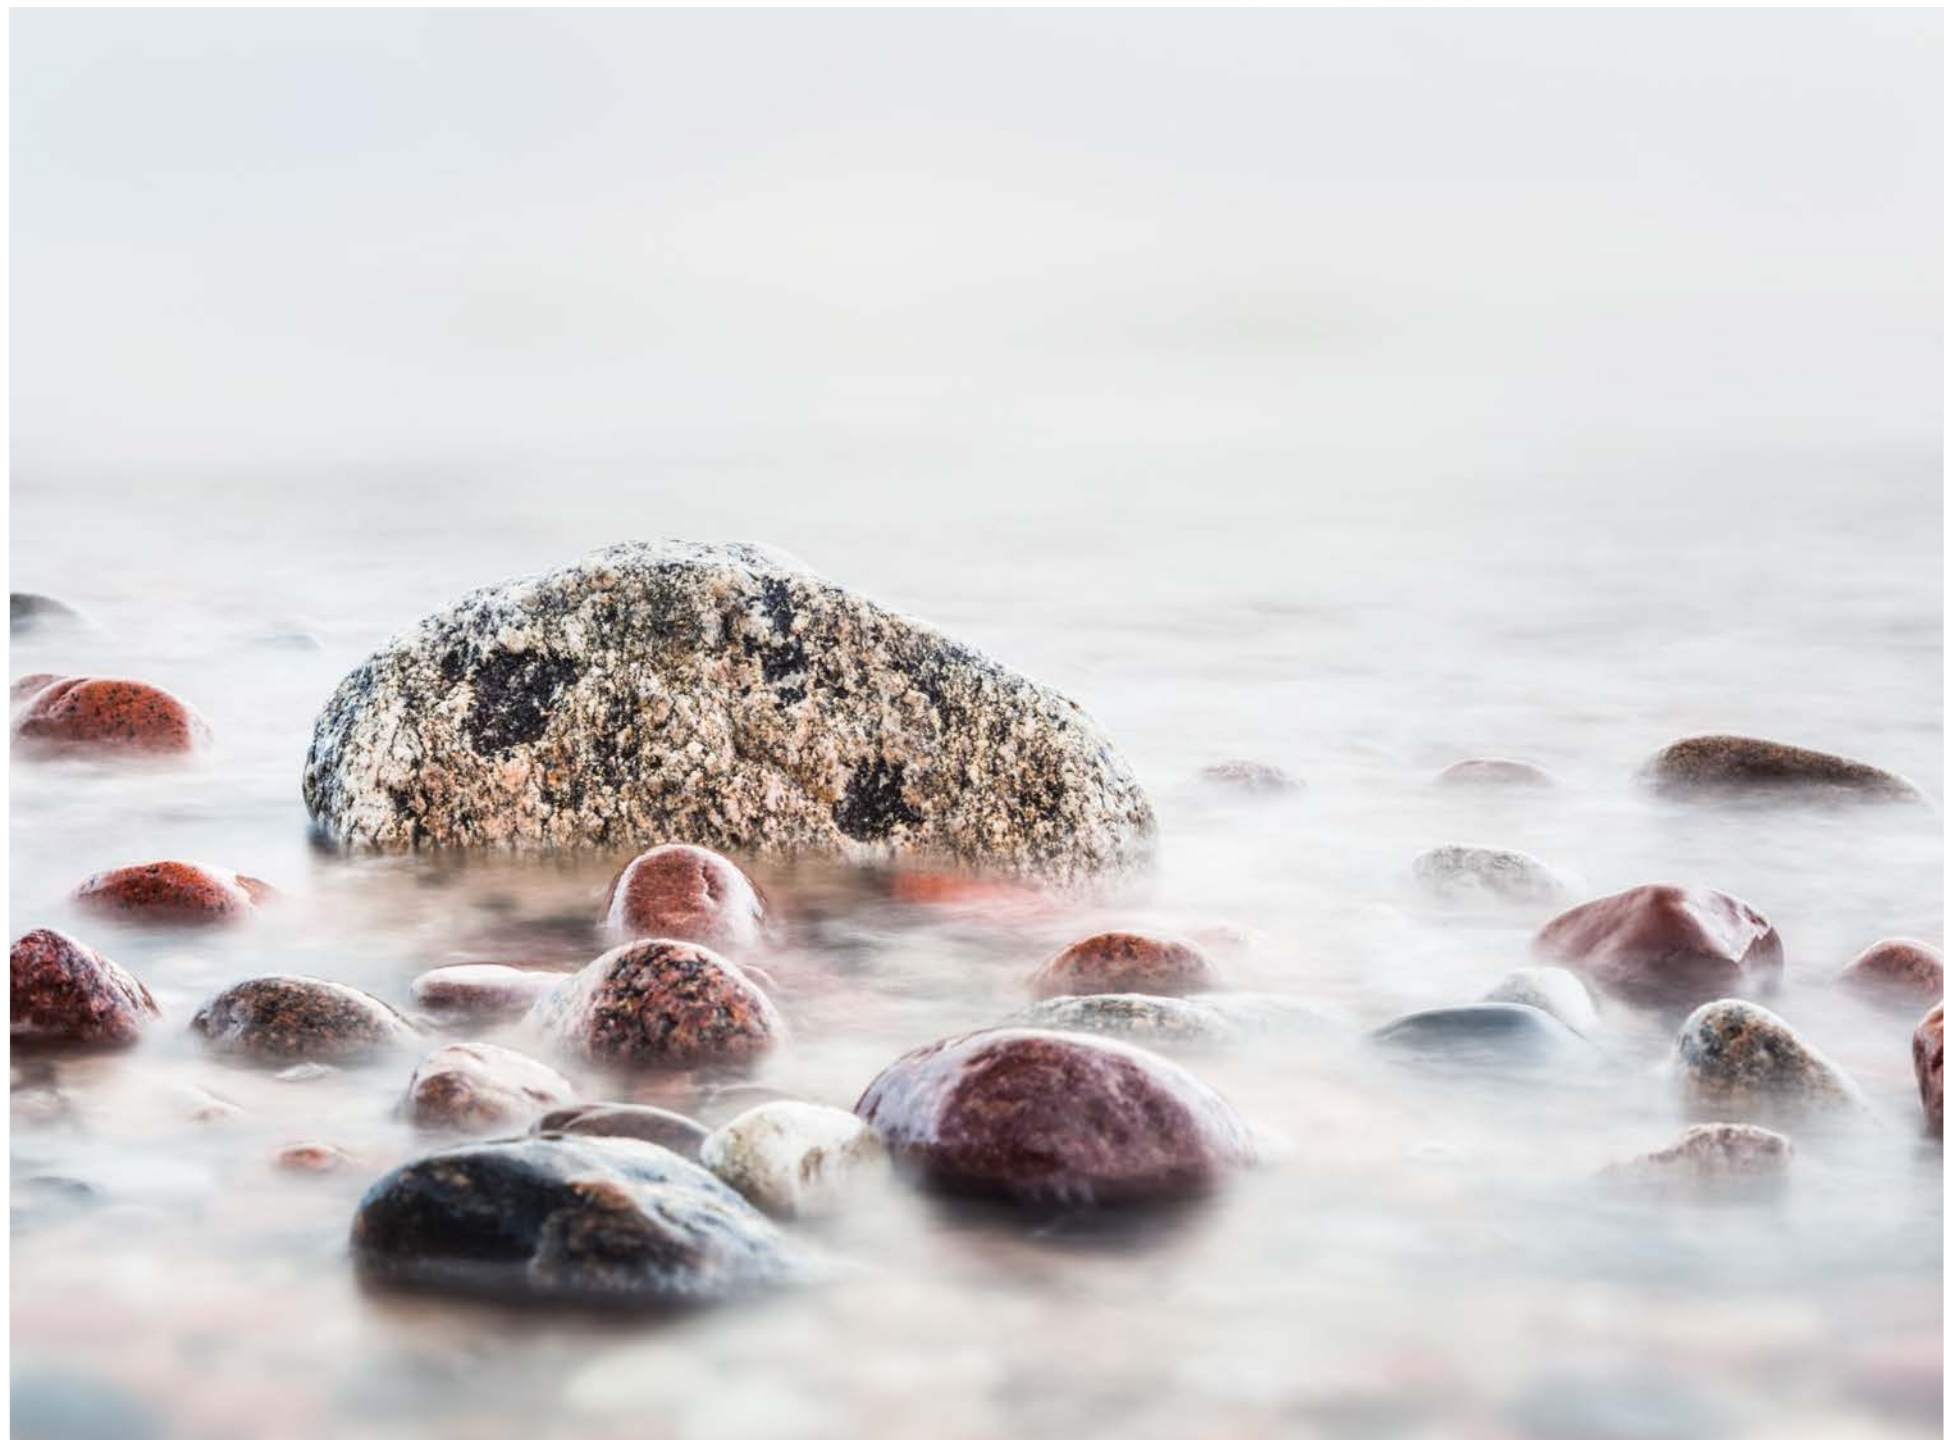



ALPHA SILVER

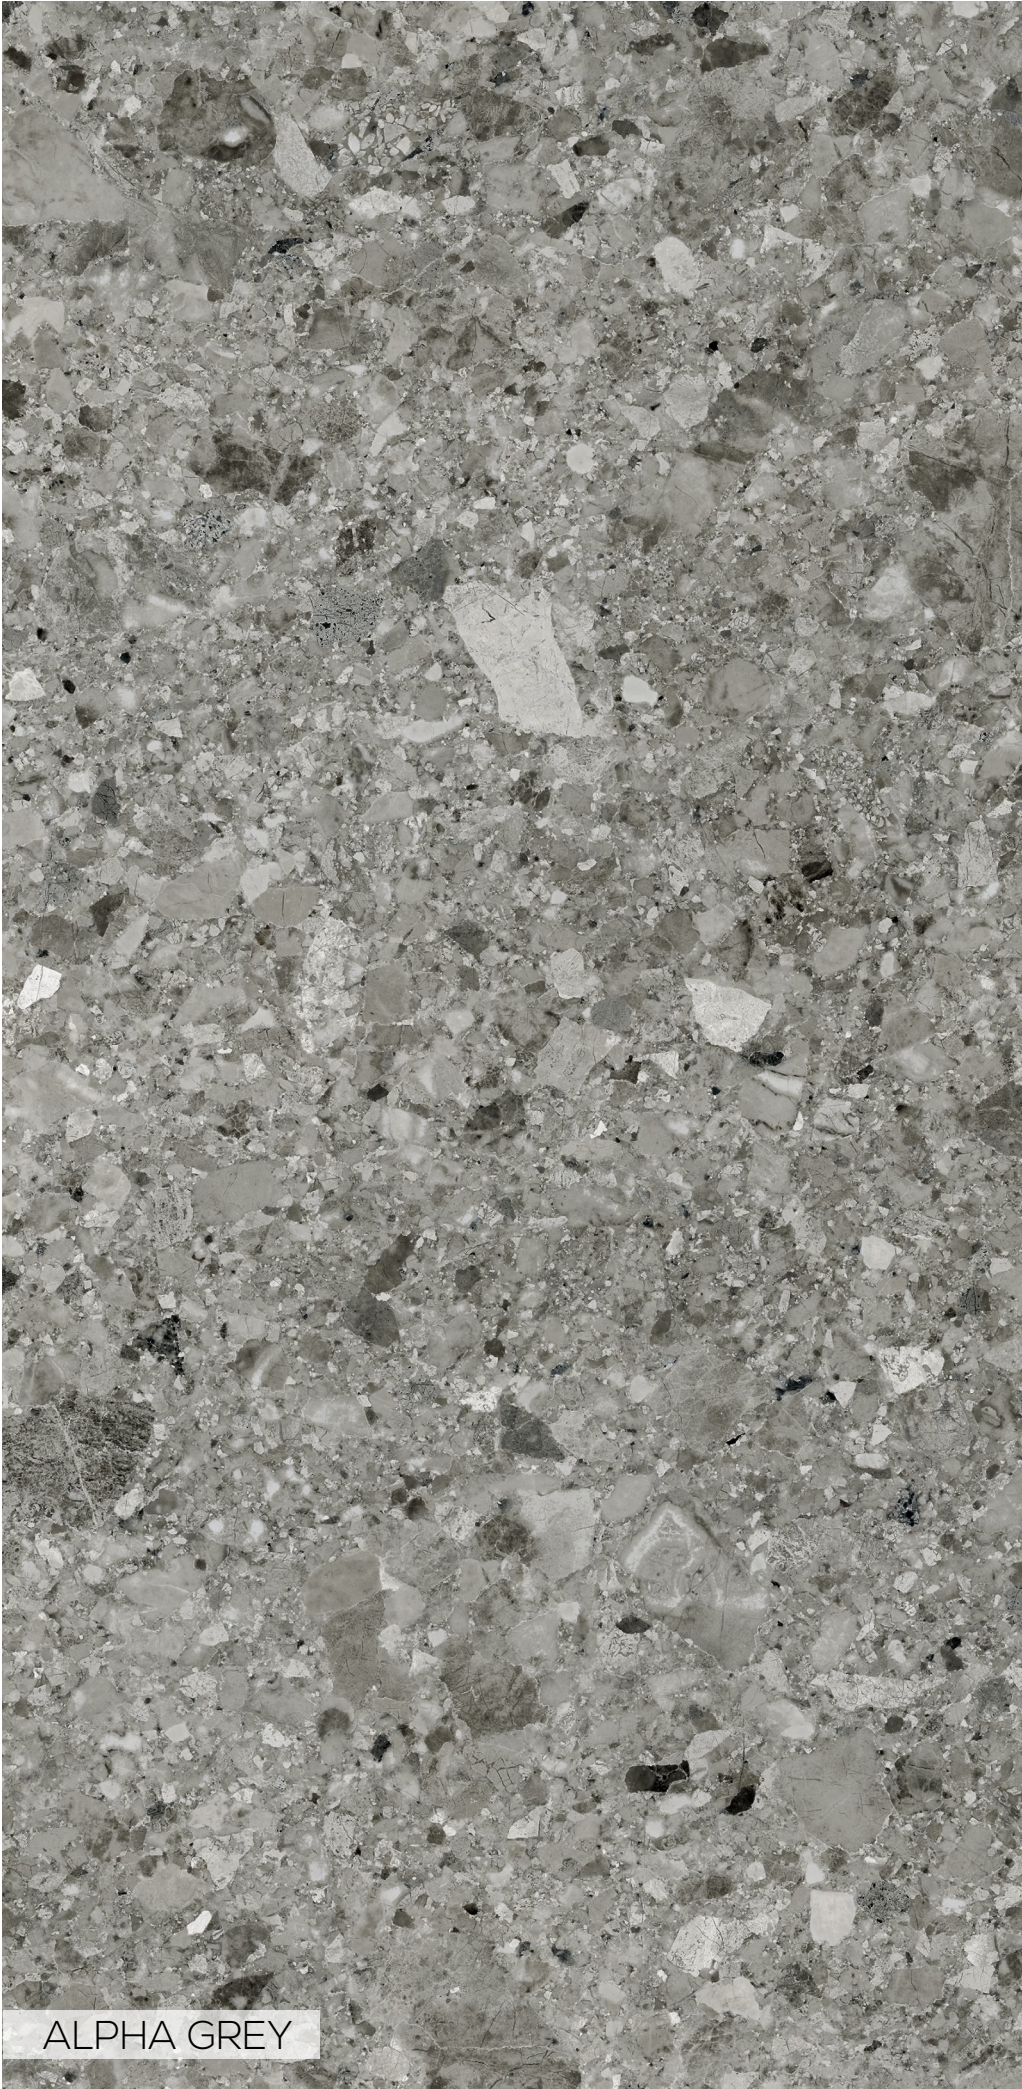

ALPHA GREY



ALPHA SILVER | 600x1200mm



BARKLEY TERRAZZO SMOKE



BARKLEY TERRAZZO BROWN



BARKLEY TERRAZZO NATURAL



CRISSEL LIGHT GREY




CRISSEL GRIS




CRISSEL BROWN




CRISSEL DARK GREY

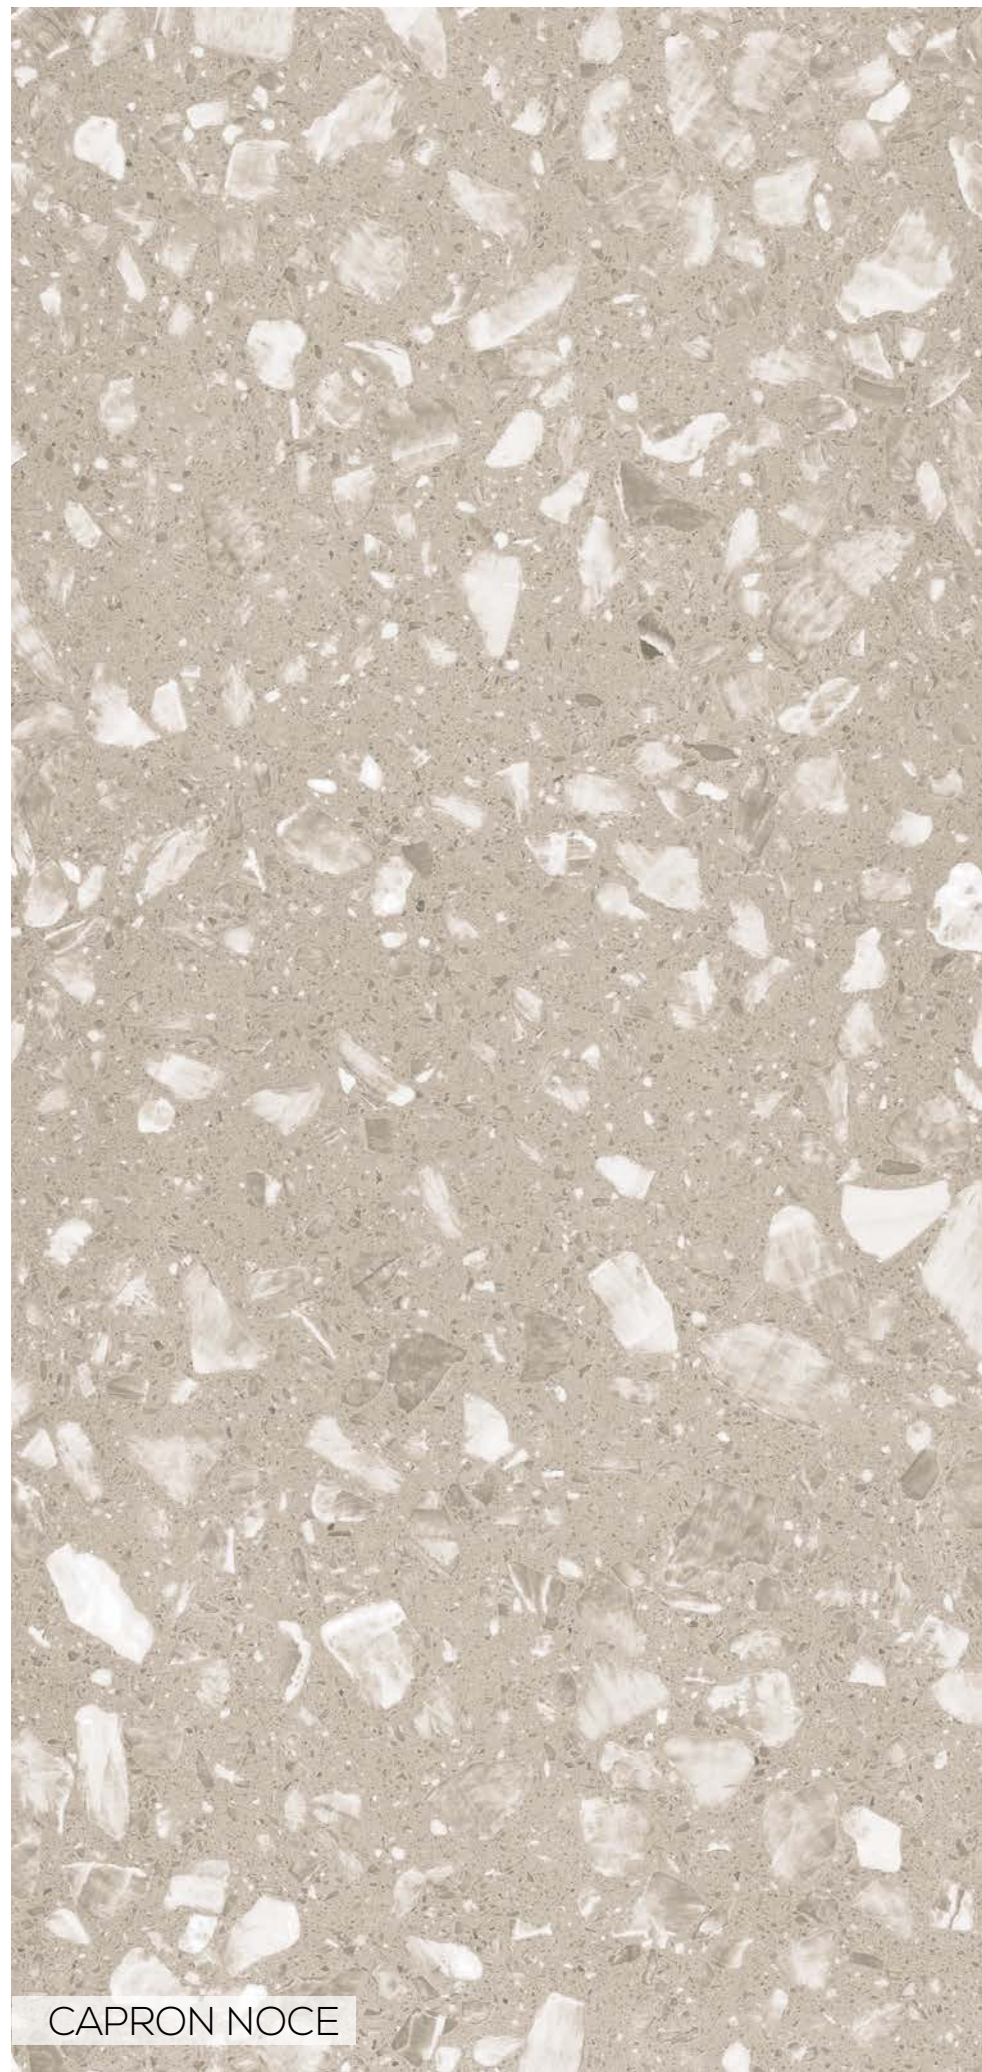


CAPRON NOCE

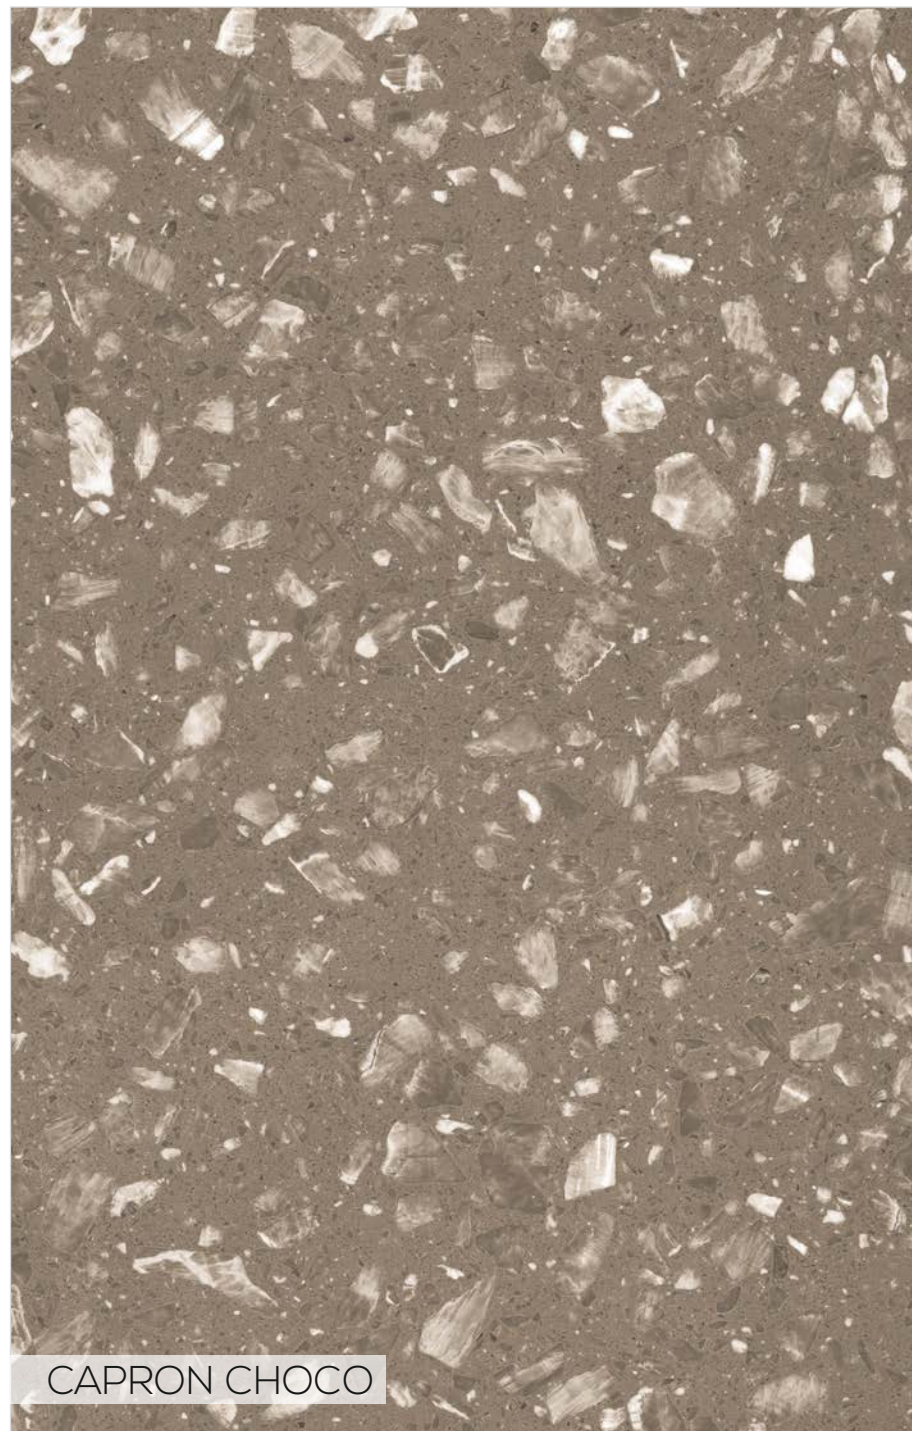



CAPRON CHOCO

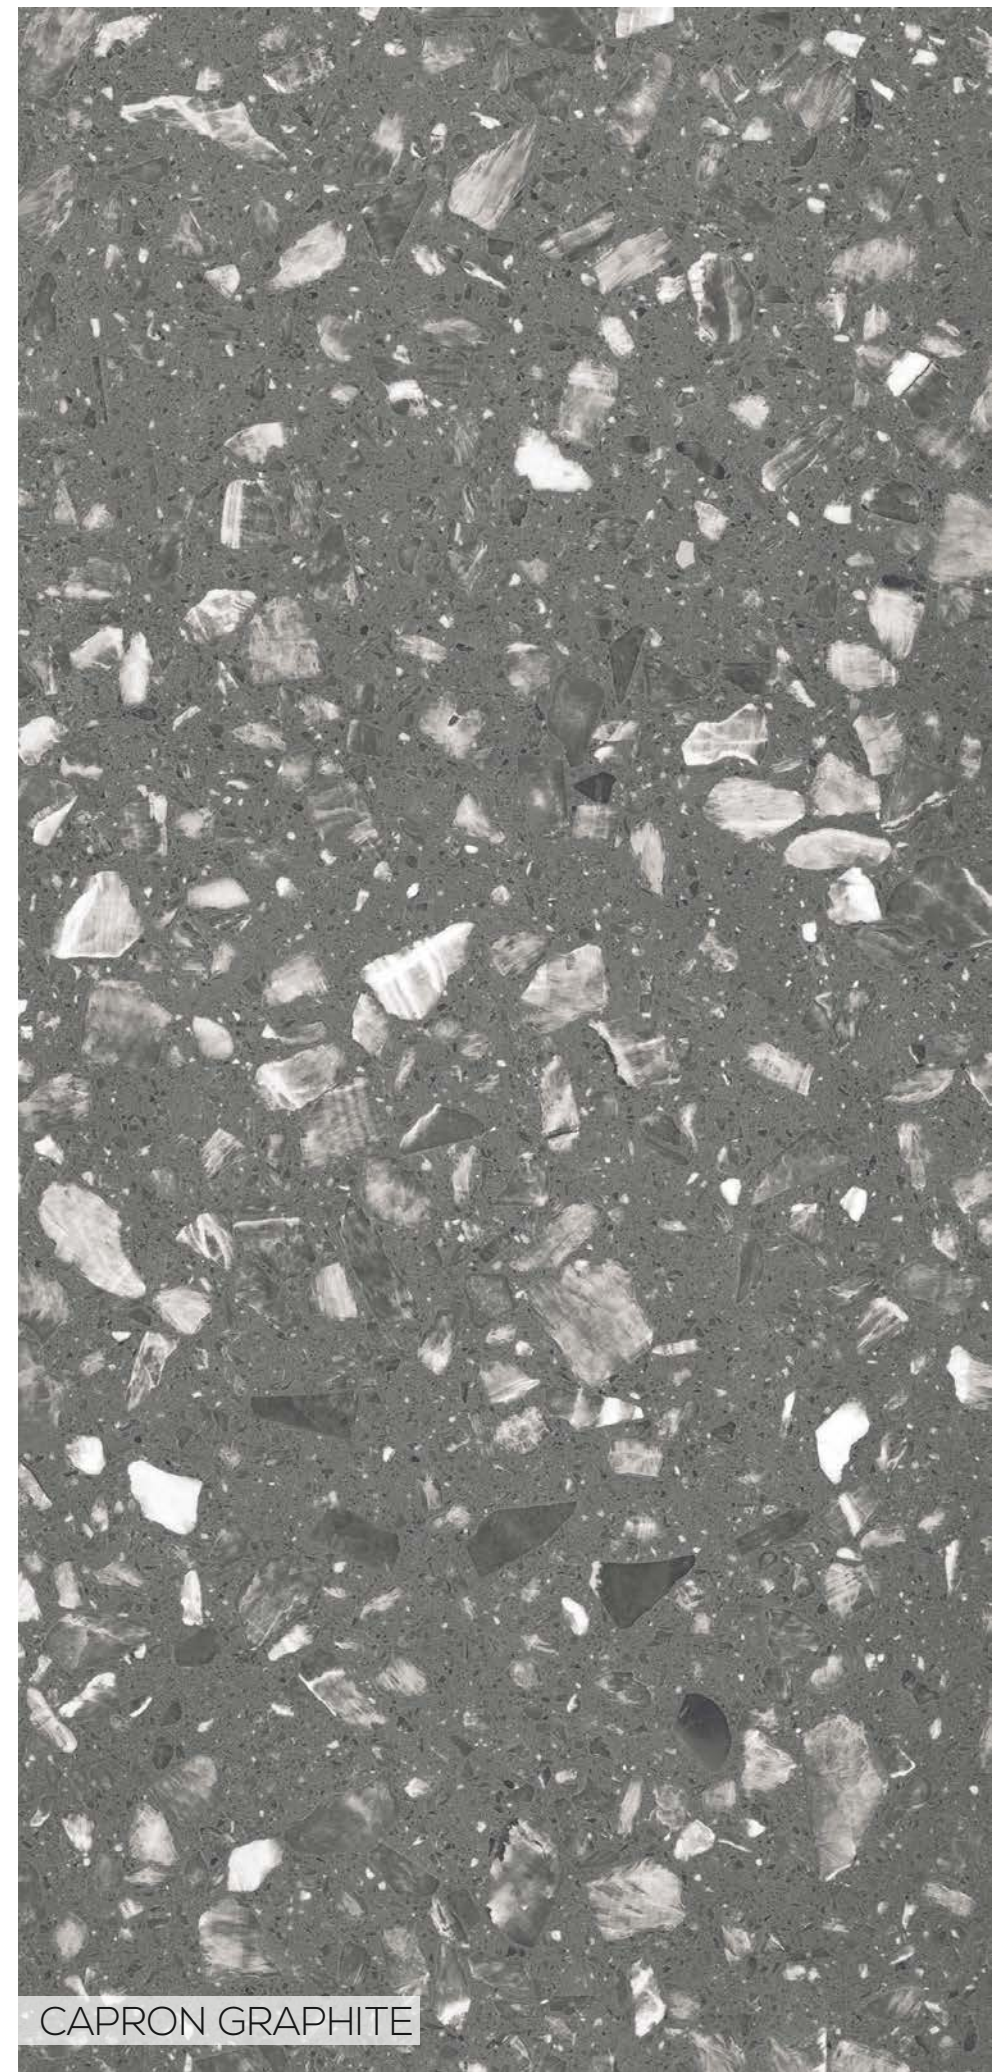


CAPRON GRAPHITE

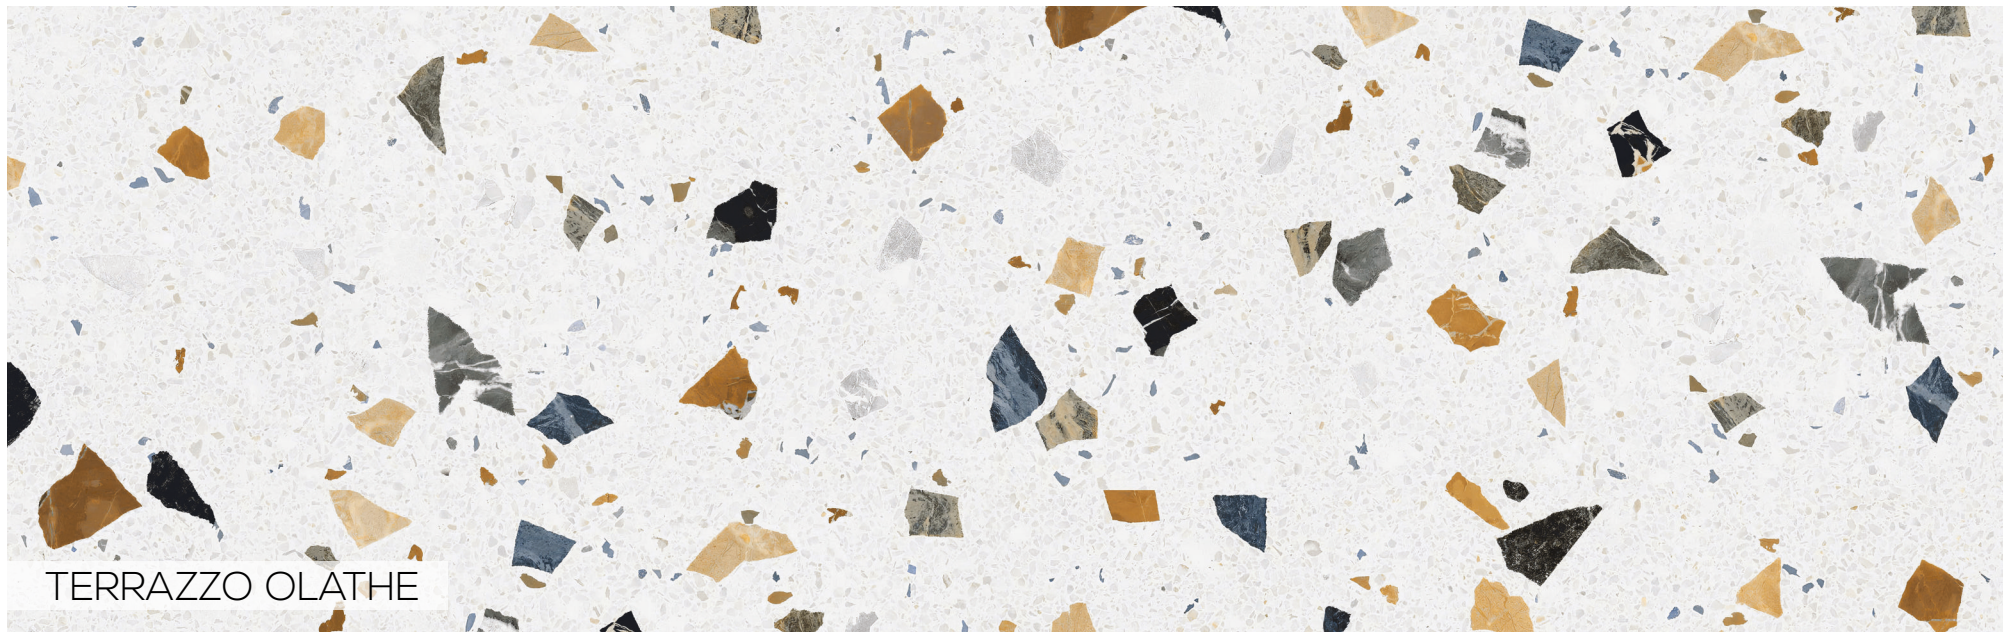

TERRAZZO OLATHE


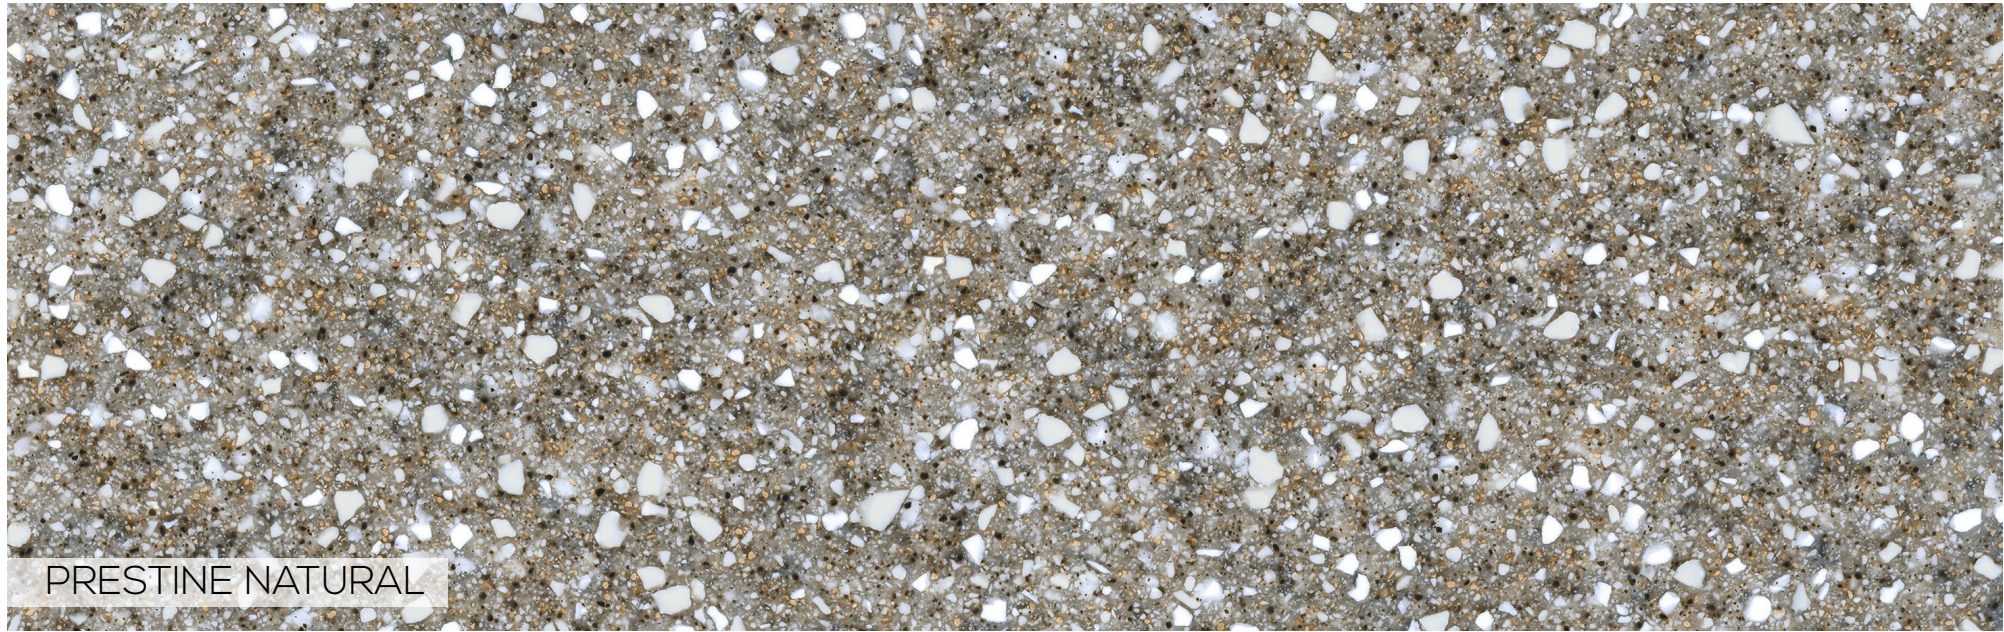
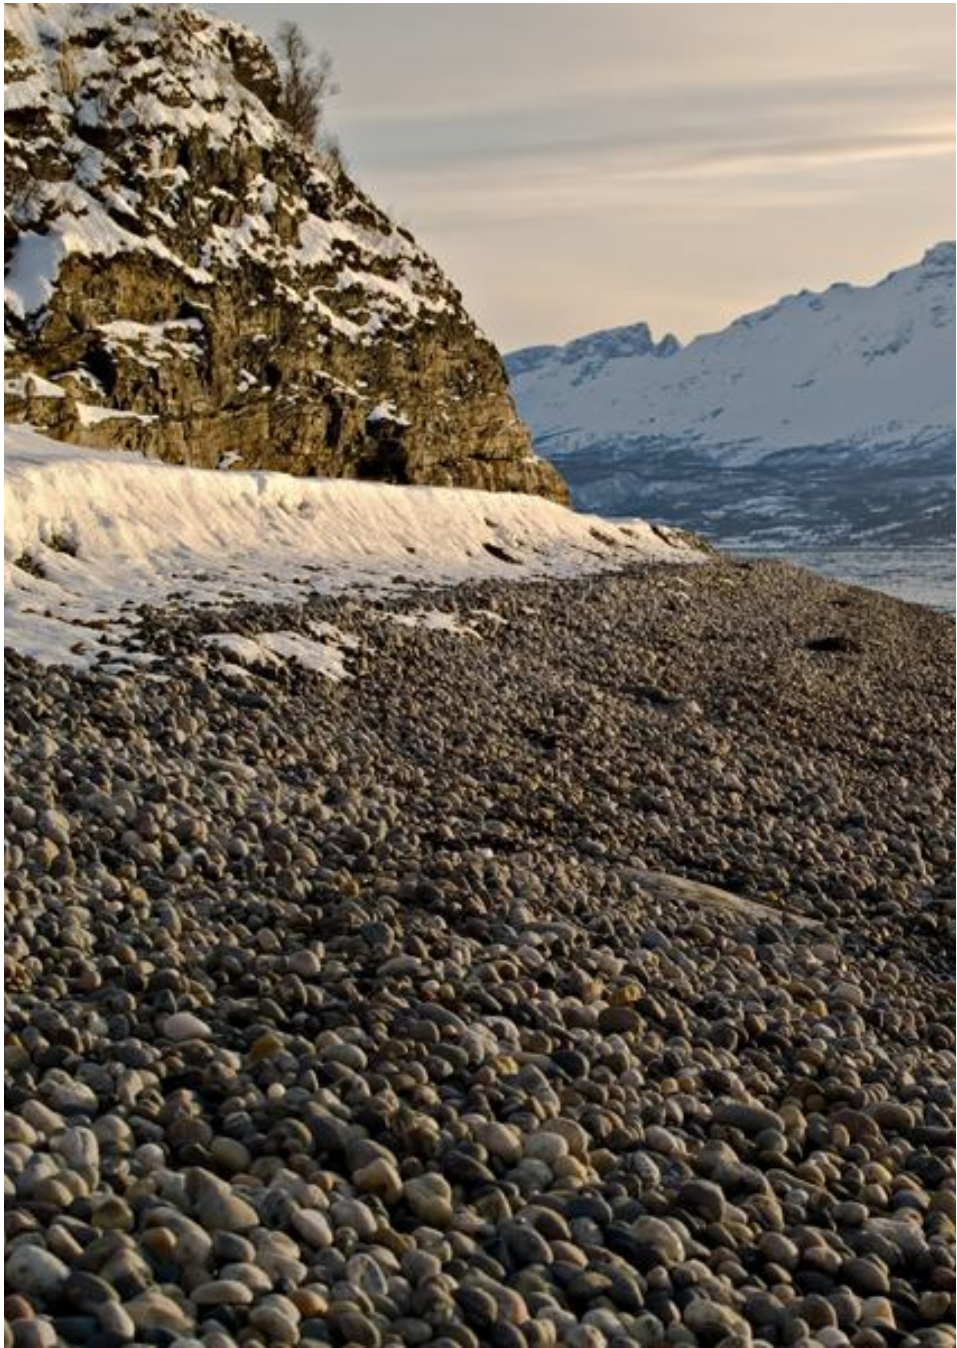








PRESTINE NATURAL

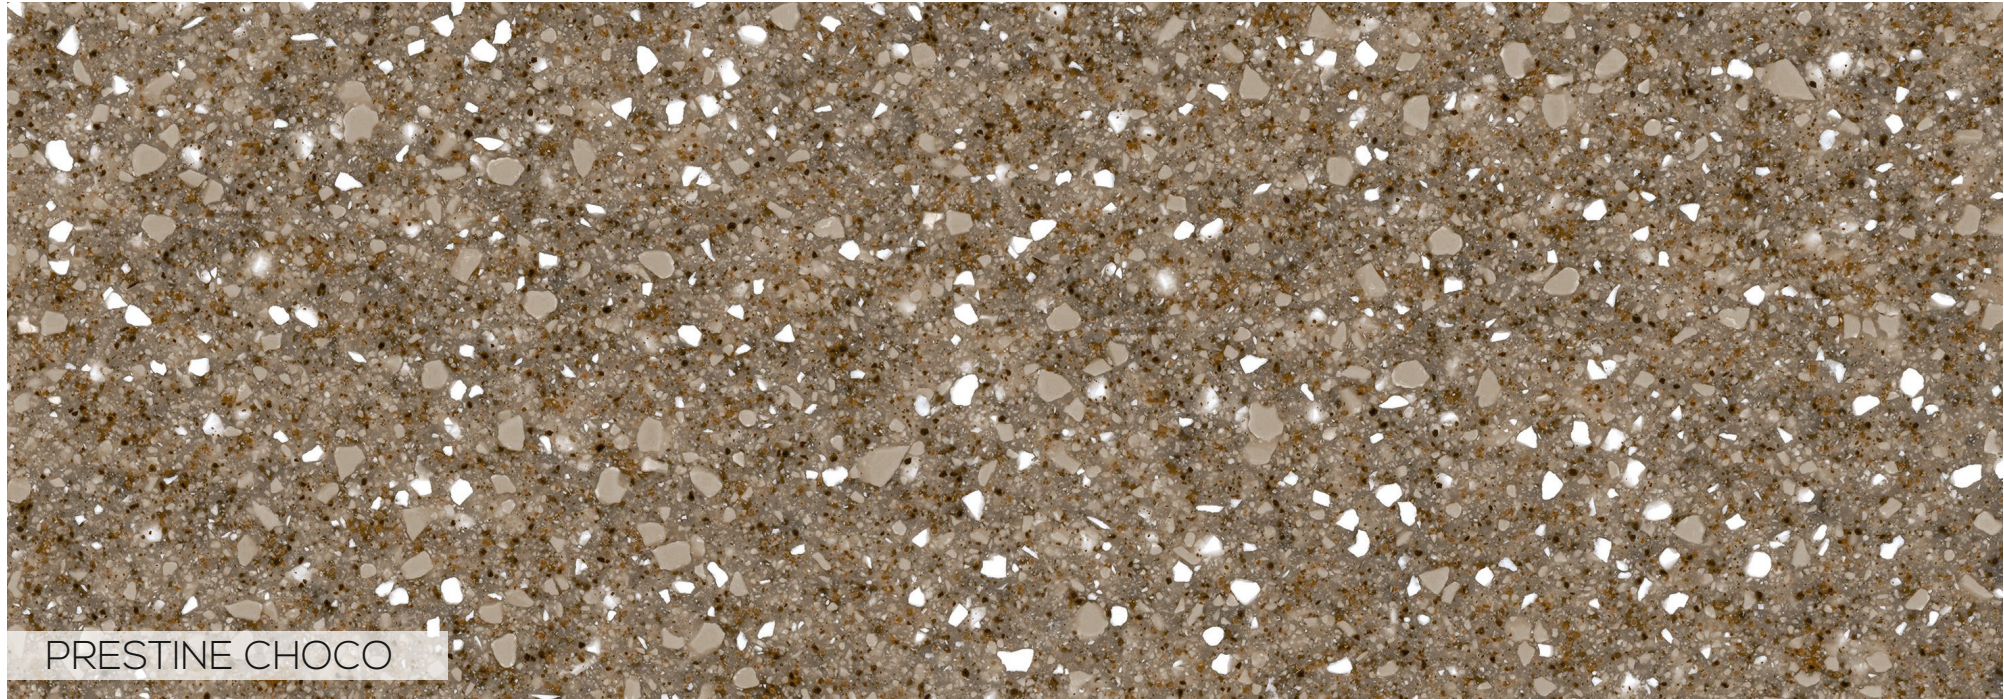

PRESTINE CHOCO



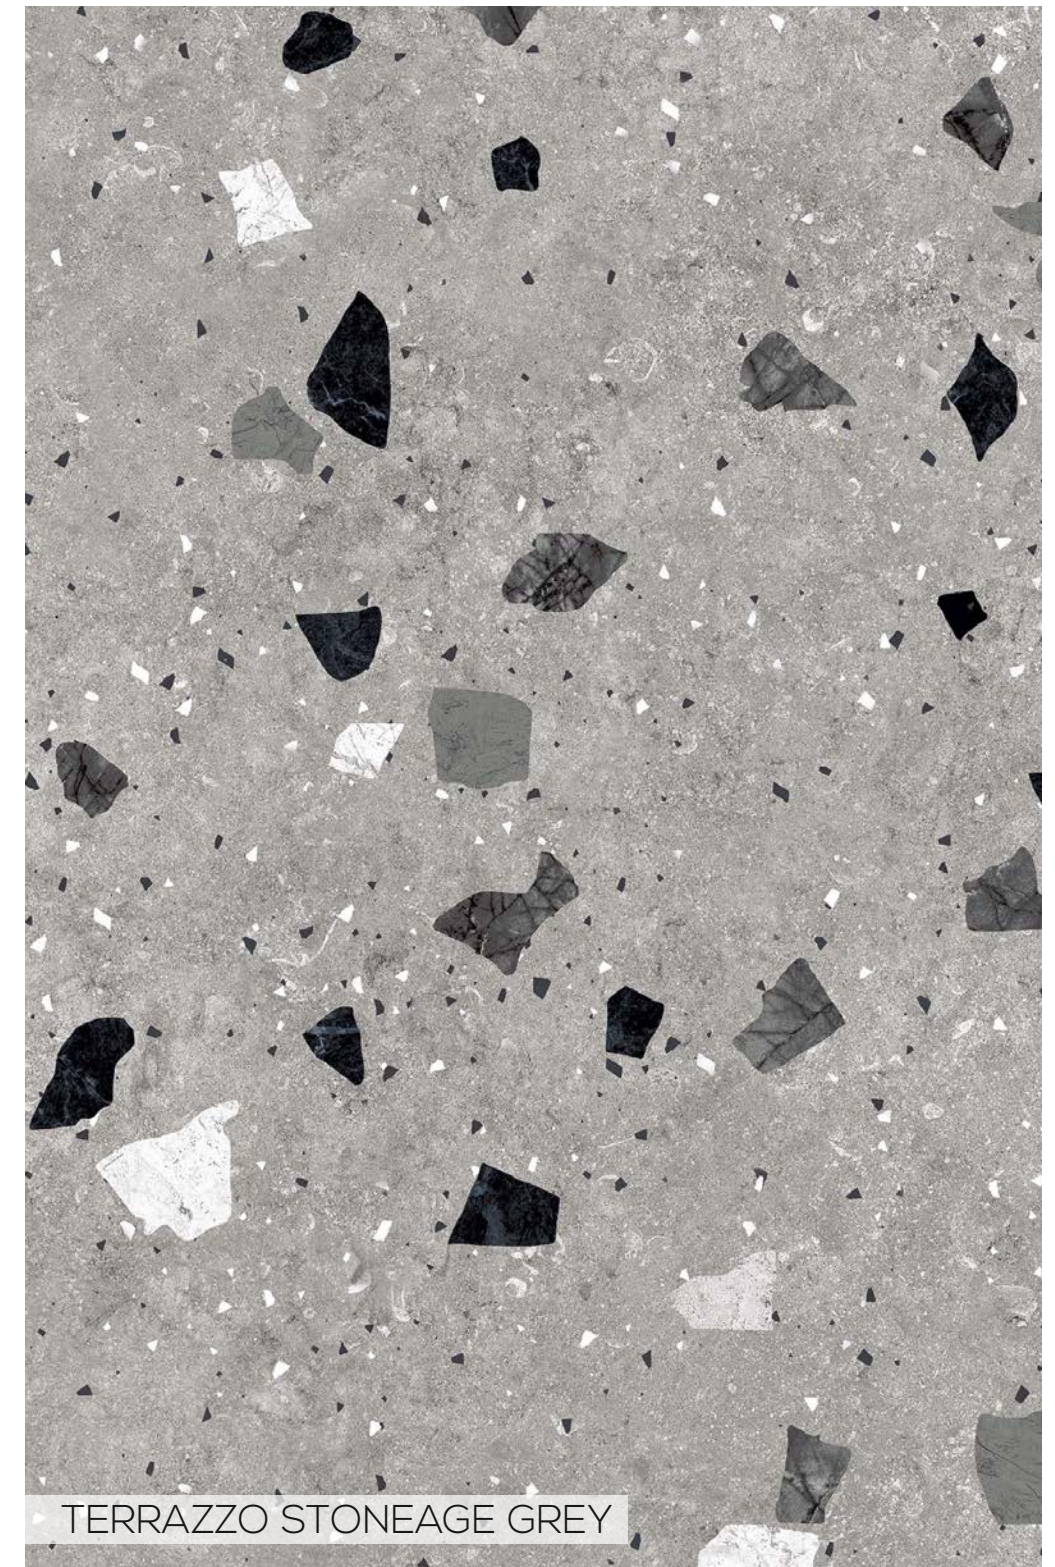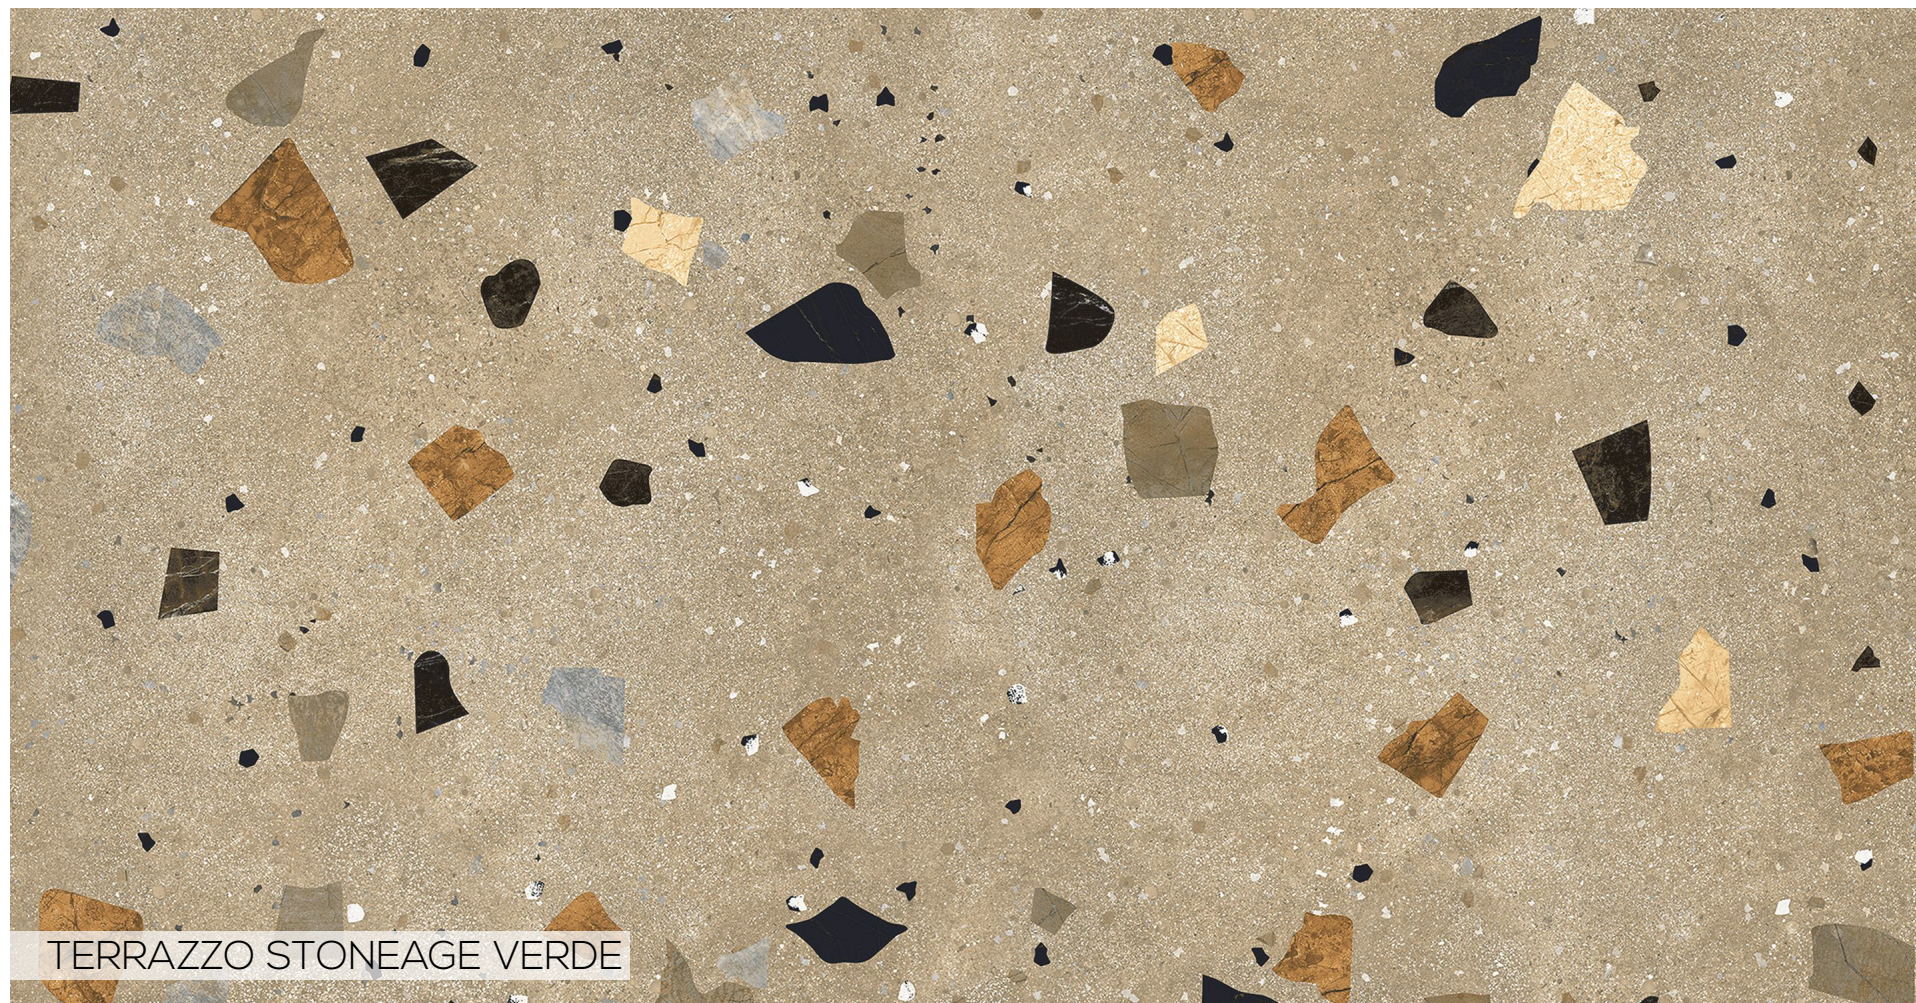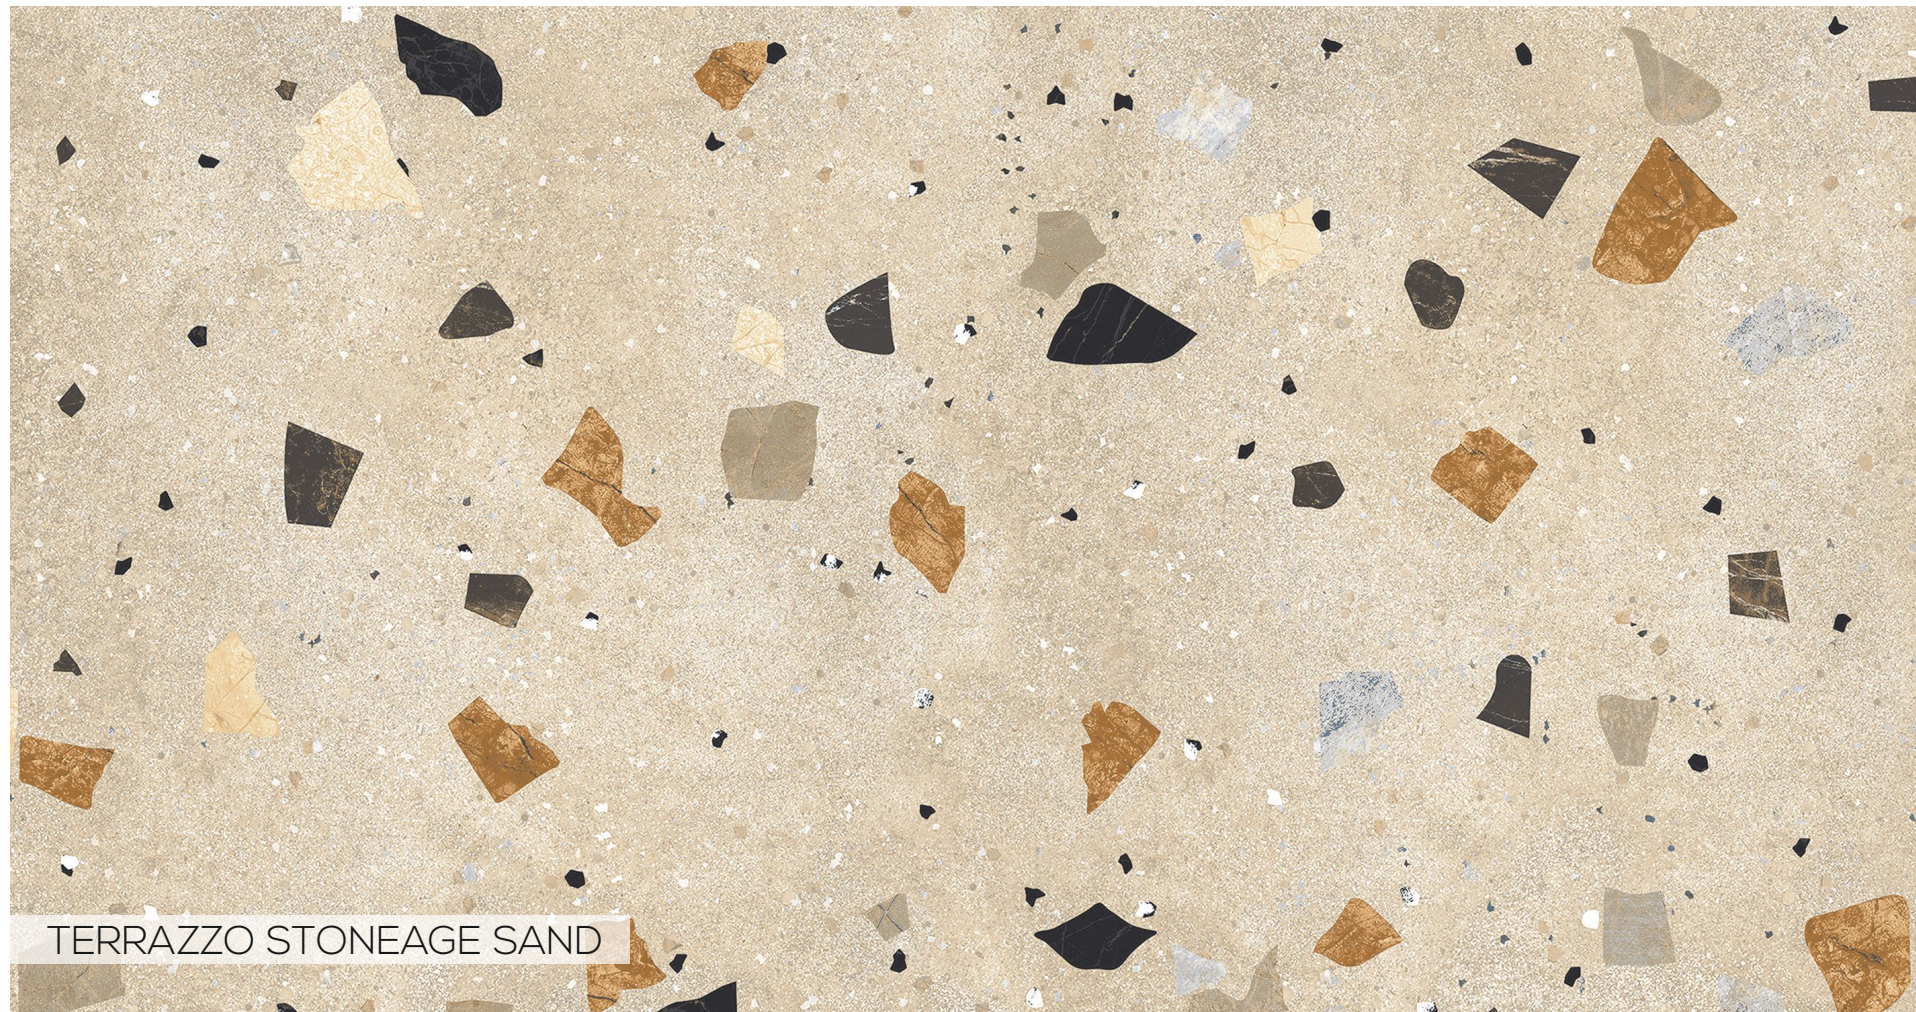

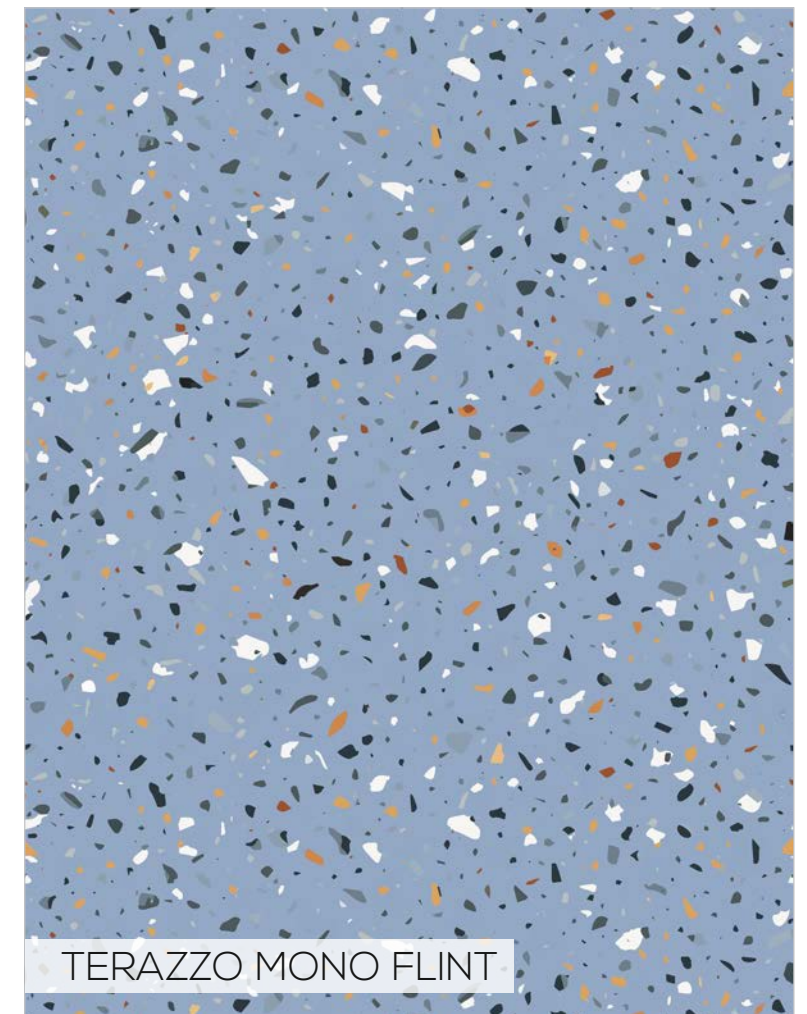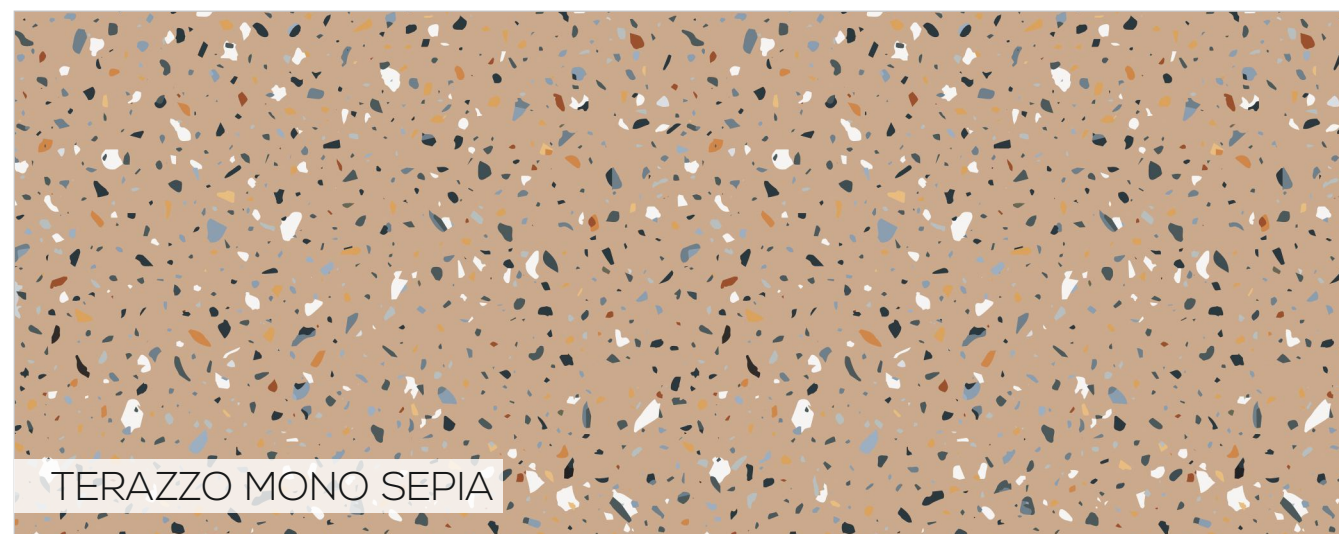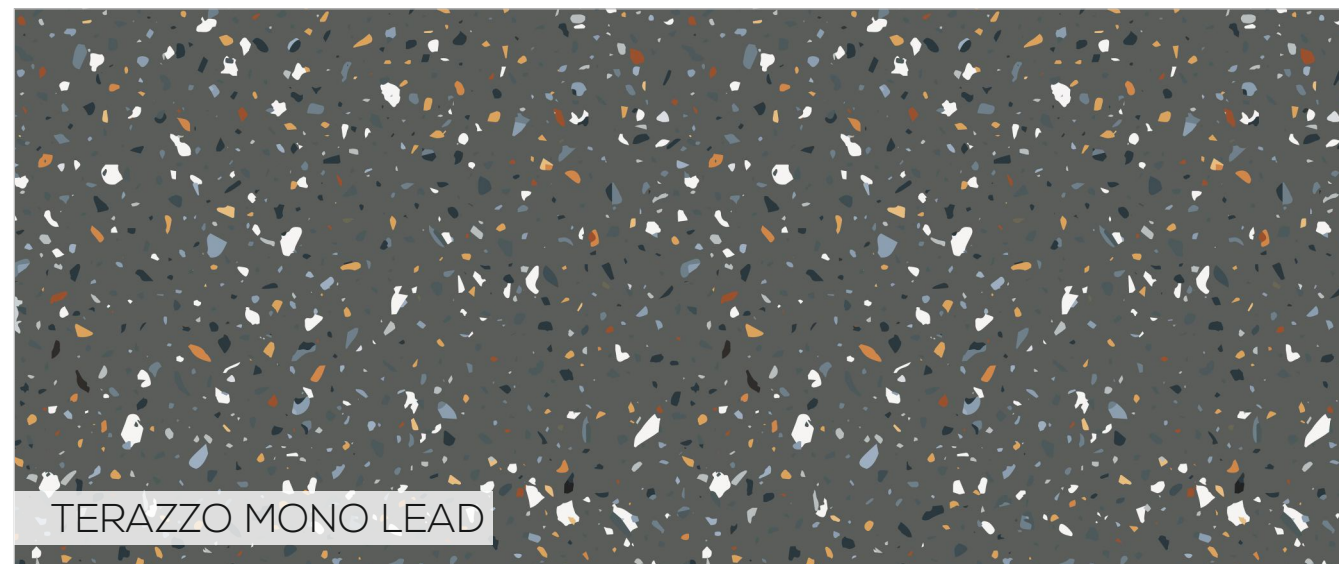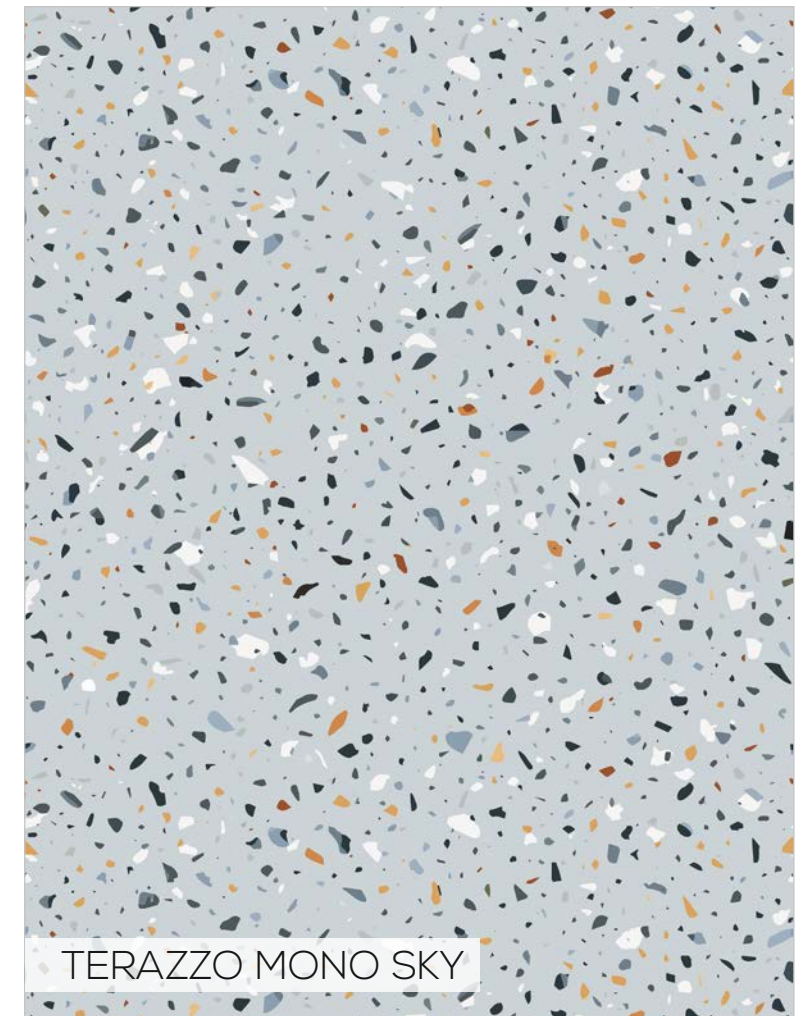
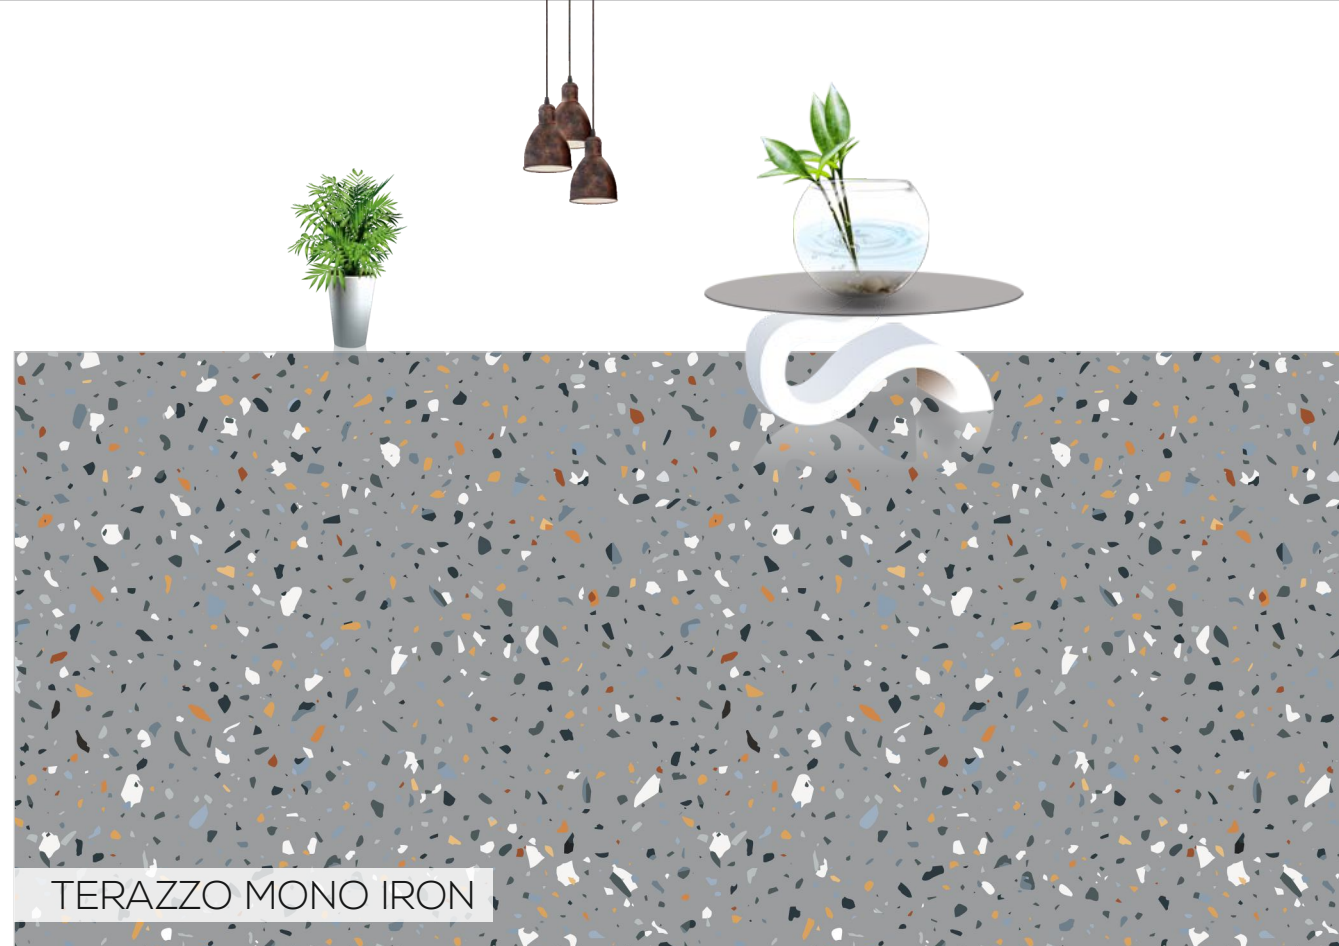
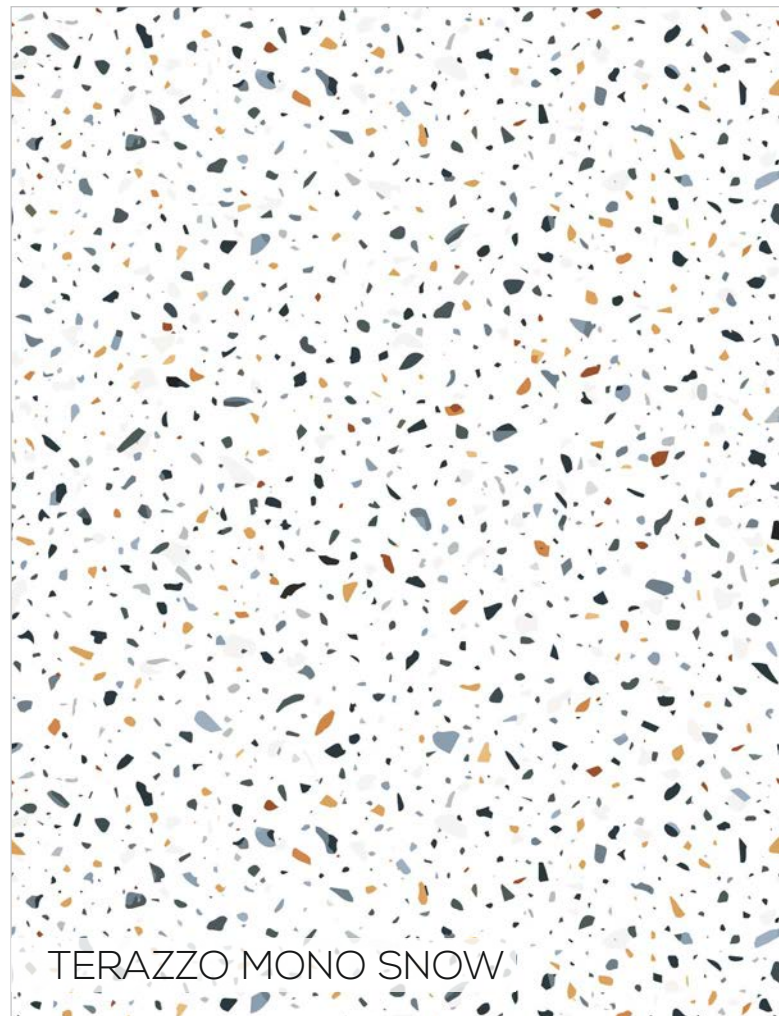










TERRAZZO WHITE | 600x1200mm

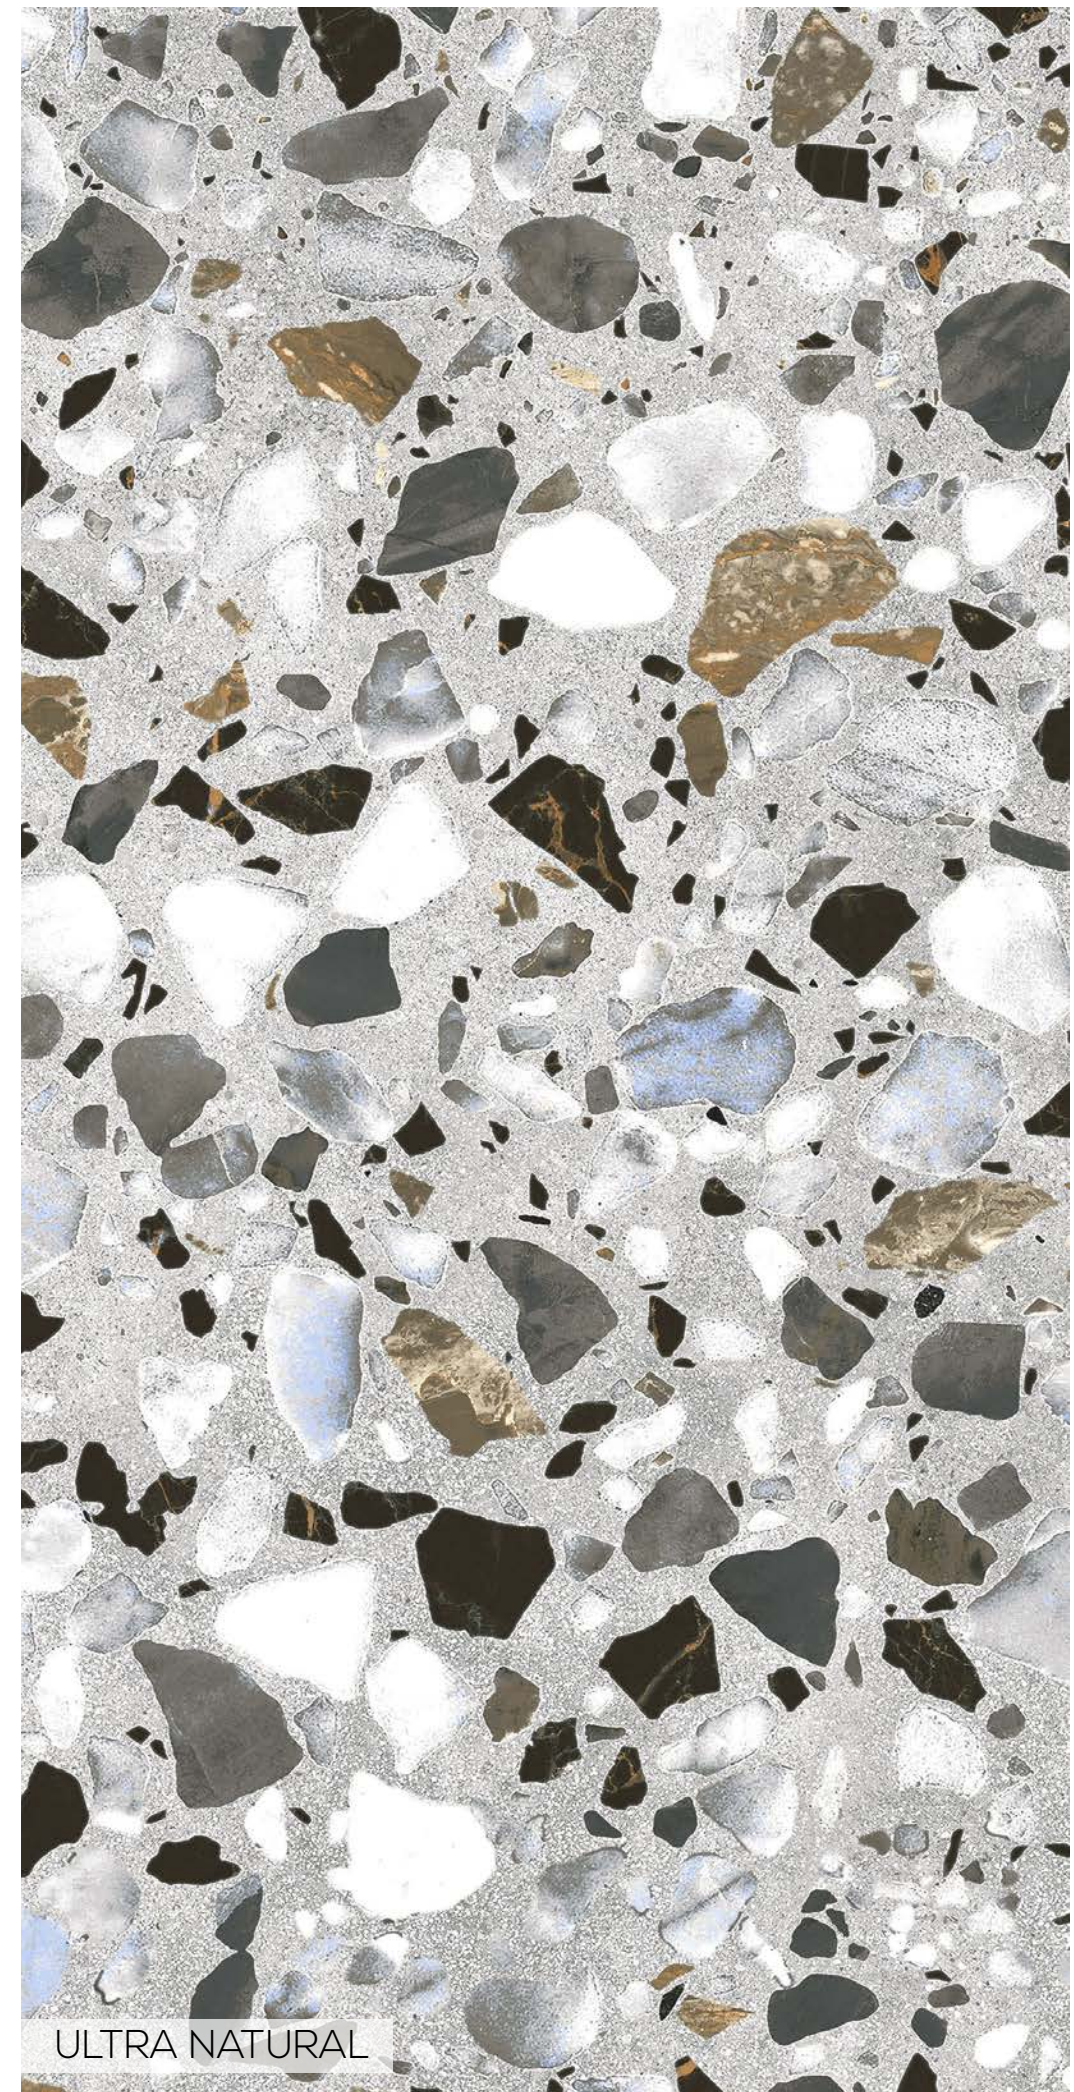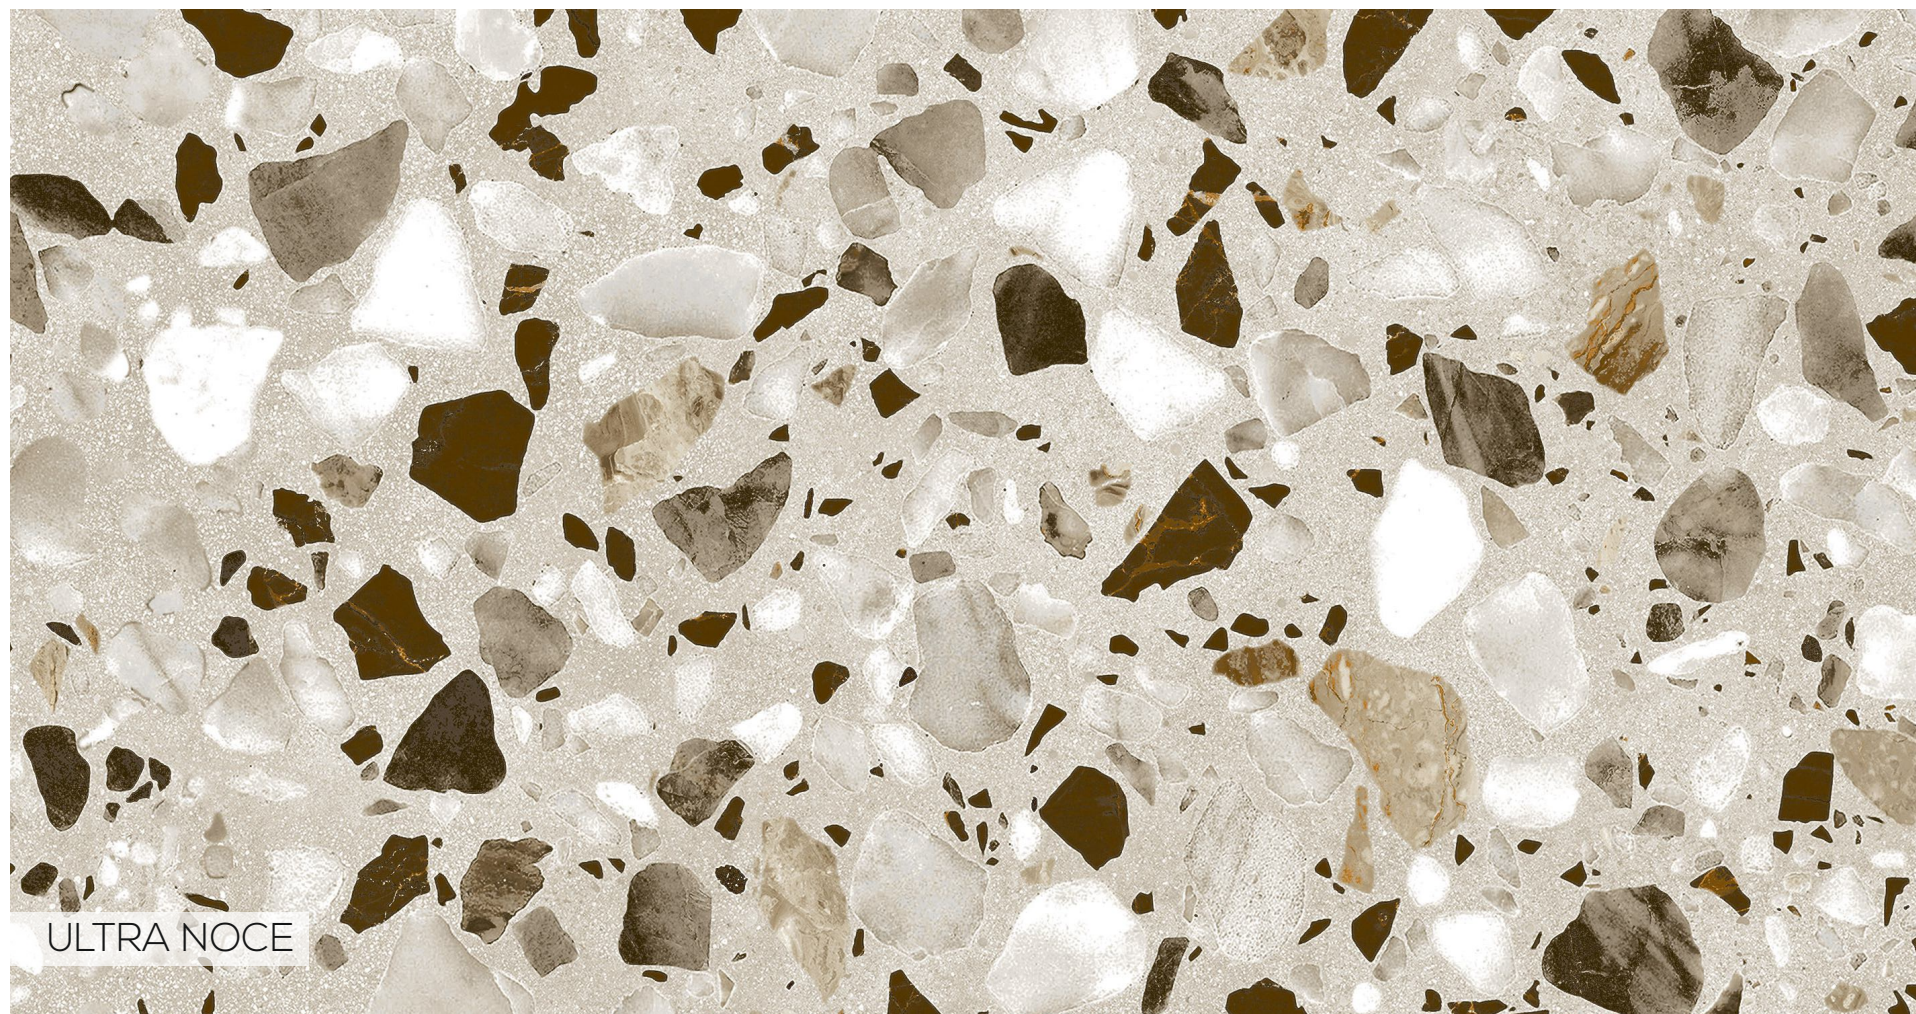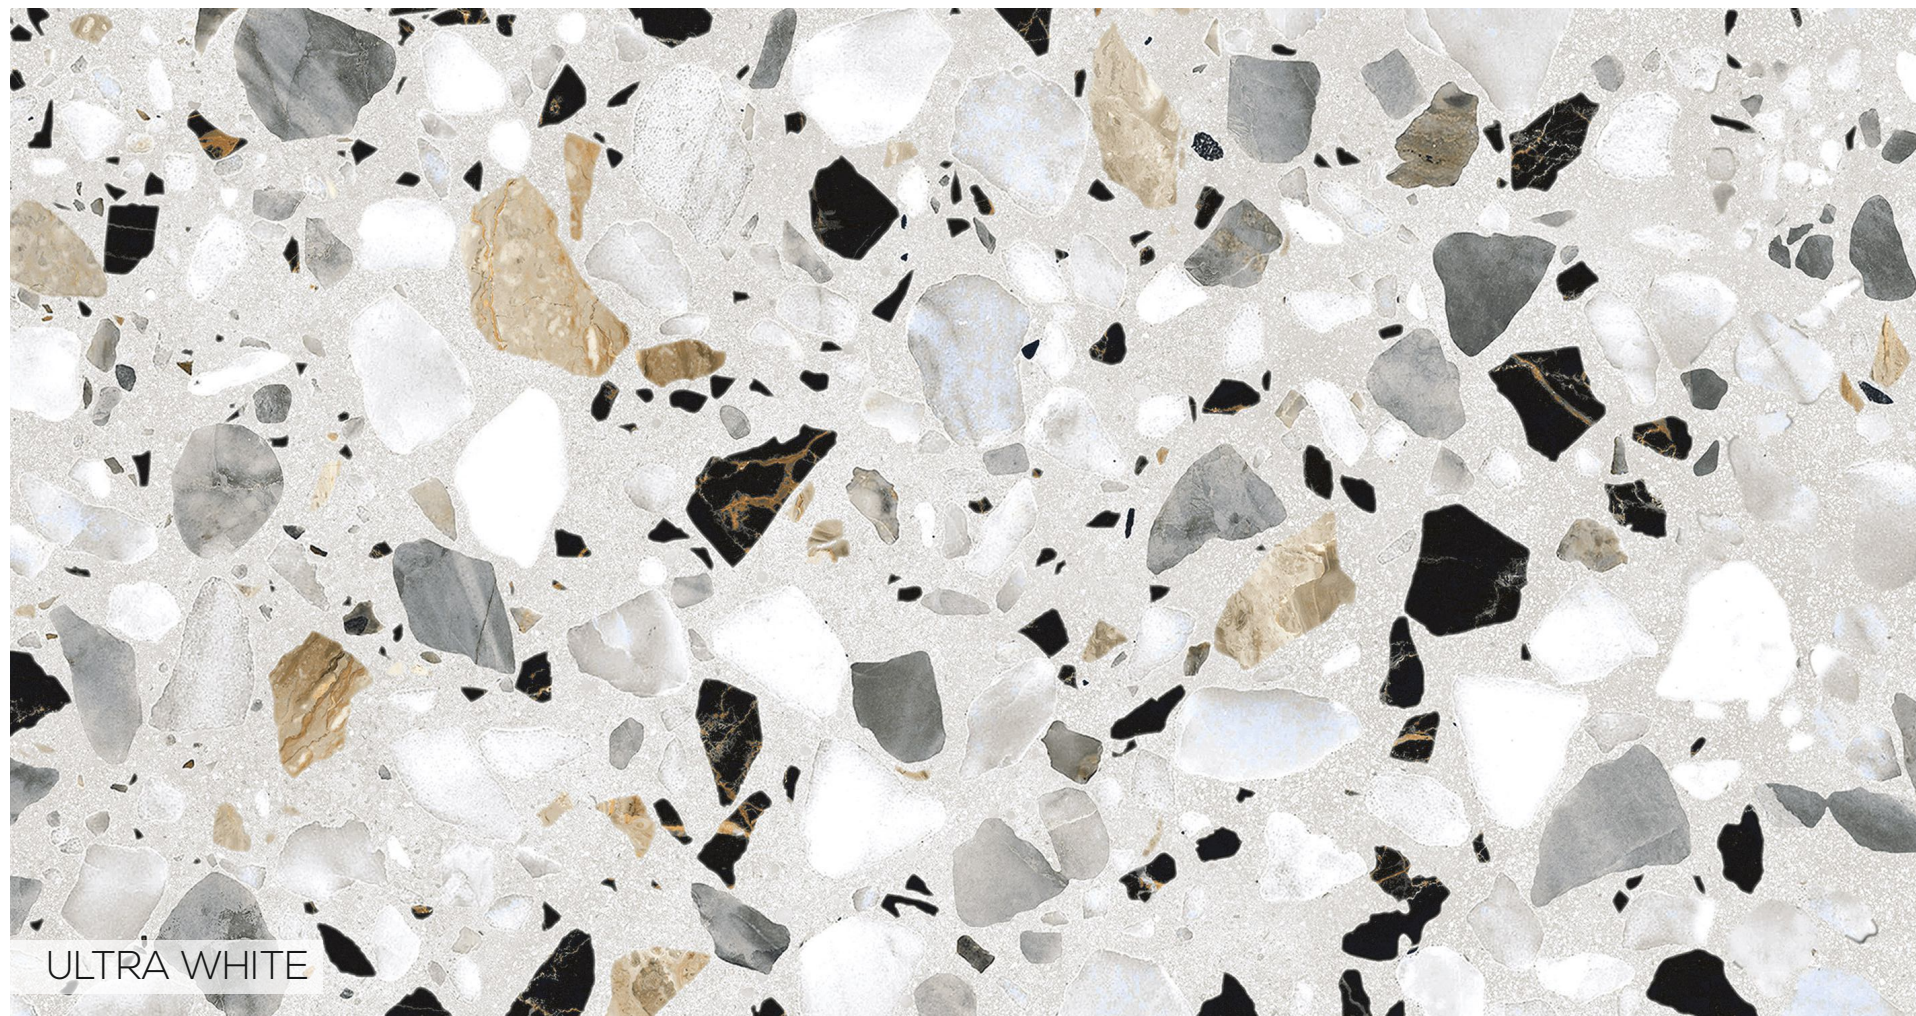

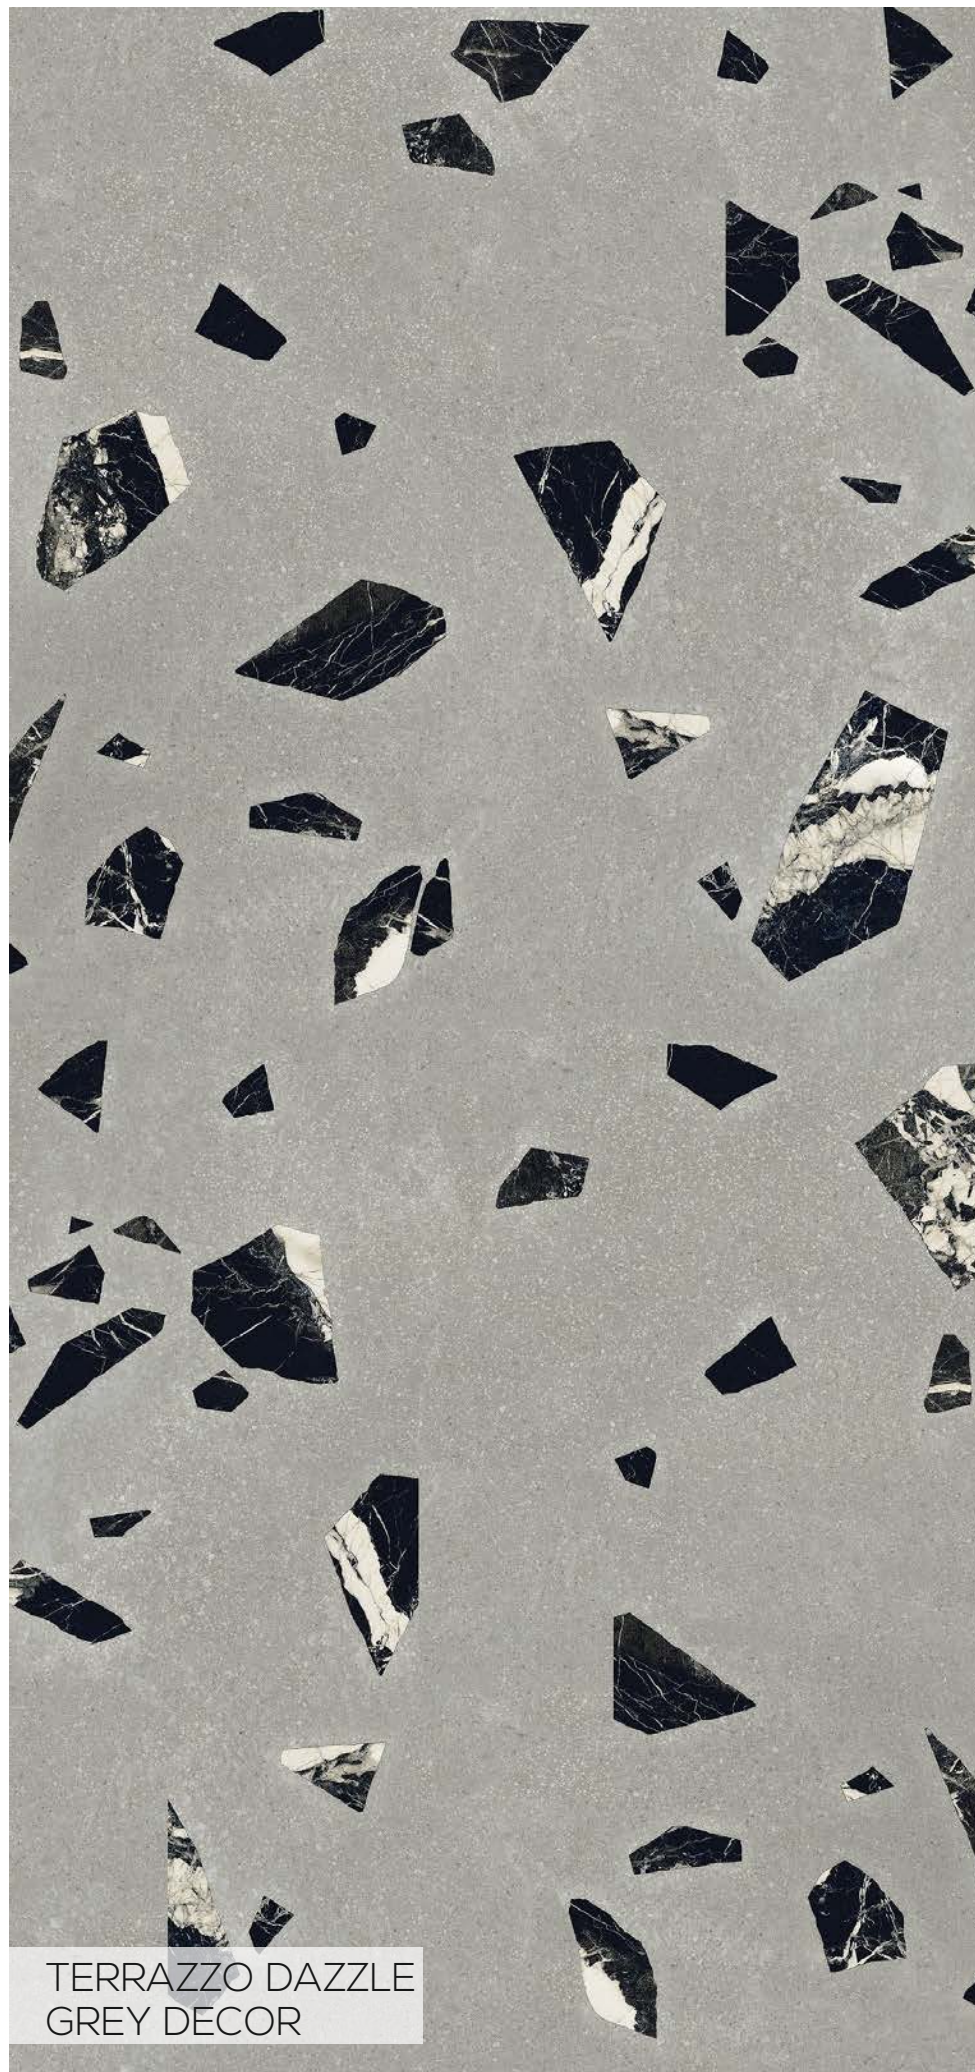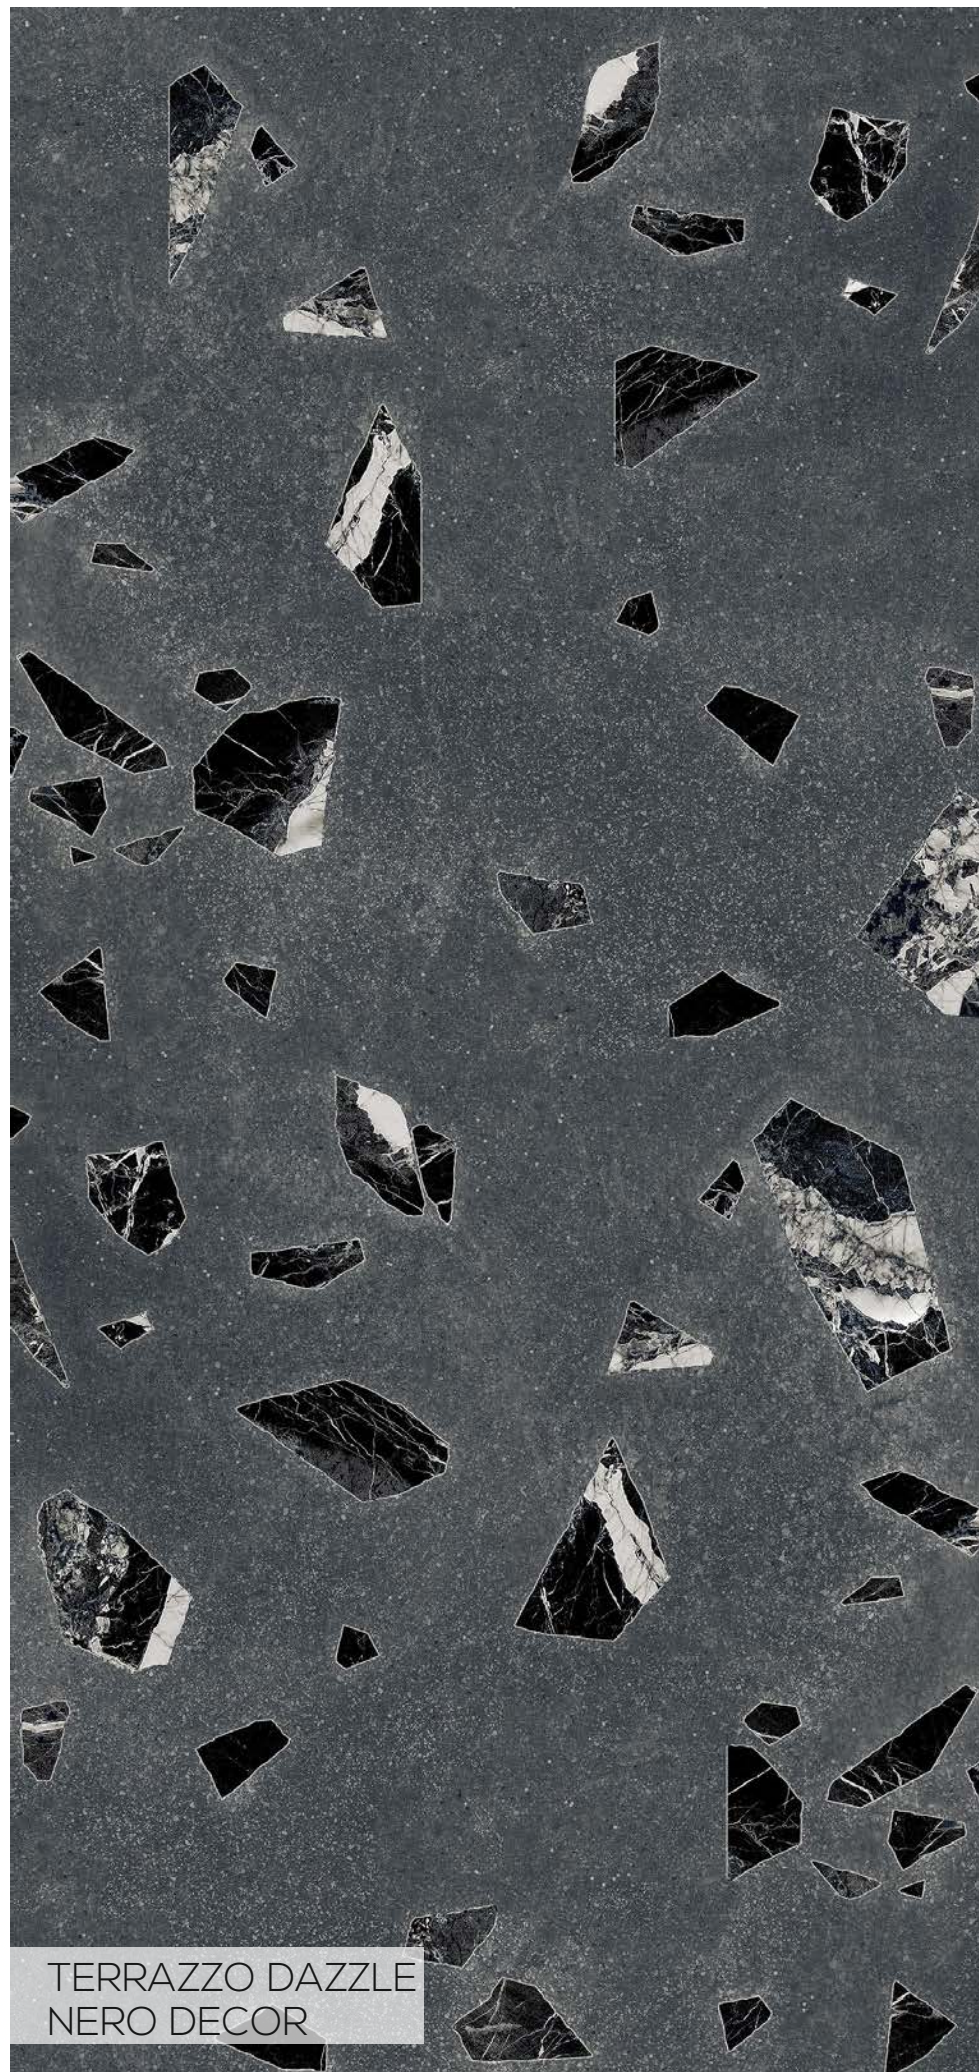

TECHNICAL
SPECIFICATION



CHARACTERISTIC	STANDARD AS PER ISO-13006 / En14411 GROUP Bla	VALUE	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	± 0.5%	± 0.3%	ISO-10545-2
Deviation in thickness	± 0.5%	± 4.0%	ISO-10545-2
Straightness in side	± 0.5%	± 0.1%	ISO-10545-2
Rectangularity	± 0.5%	± 0.1%	ISO-10545-2
Surface flatness	± 0.5%	± 0.2%	ISO-10545-2
Color difference	Unlterned	No change	ISO-10545-16
Glossiness	As per mfg.	Min 90 %	GLOSSY METER
STRUCTURAL PROPERTIES			
Water absorption	< 0.50%	< 0.05%	ISO-10545-3
MASSIVE MECHANICAL PROPERTIES			
Modulus of repture	Min. 35 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 1800 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
THERMO HYGROMRTRIC PROPERTIES			
Frost resistance	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	ISO-10545-9
Moisture expansion	Nill	Nill	ISO-10545-10
Thermal expansion(COE)	Max. 9.0x10 ⁻⁶	Max. 6.5x10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Min. Class 3	Class 5	ISO-10545-14

